

/// 2024 PRODUCT CATALOG



A CENTURY OF INNOVATION EST. 1924

There's 100 years of innovation behind every trigger pull, every board cut, every screw driven. Over the past century, SKIL has been innovating and pushing the boundaries of what's possible, revolutionizing the way we work.

From the saw that built America to drilling and driving technology designed for today's power tool users, SKIL has time and again planted the flag first.

As we look forward, SKIL's commitment to innovation is unwavering. SKIL remains focused on developing the right tools and technologies for today's professionals and homeowners.

When you choose SKIL, you're choosing more than just a tool, you're choosing a legacy of invention and a commitment to excellence. We're proud of our 100-year history, but we're even more excited about the future.

Join us on our mission to celebrate the past as we look forward to the future.



PWRCORE 12™

PWRCORE 20™

PWRCORE 40™



/// OVER 130 NEW TOOLS

/// 5-STAR RATED PRODUCTS

/// BACKED BY A5-YEAR WARRANTY





8 PWRCORE 12™ SYSTEM

8-19 TOOLS

20-21 TOOL COMBO KITS

22 PWRCORE 20[™] **SYSTEM**

22-41 TOOLS

42-43 TOOL COMBO KITS

44-49 OUTDOOR POWER

49 OUTDOOR POWER COMBO KITS

50 PWRCORE 40™ **SYSTEM**

50-59 OUTDOOR POWER

59 OUTDOOR POWER COMBO KITS

60 HIGH PERFORMANCE CUTTING

60-71 TOOLS

72 BENCHTOP & CORDED TOOLS

72-86 TOOLS 87 TOOL COMBO KITS

88 LASERS & LEVELS

88-93 TOOLS

94 4V SCREWDRIVERS

94-99 TOOLS

100 ACCESSORIES

100-110 POWER TOOL

111-113 OUTDOOR POWER

114-117 HIGH PERFORMANCE

BORE 12TM

BRUSHLESS

The **PWR**CORE 12[™] system offers a range of tools with compact, lightweight power and innovative features.





PATENTED BATTERY TECHNOLOGY PWRCORE 12"



Industry-leading battery technology wraps each cell with cooling material to keep the battery powering on for 25% longer runtime and 2X battery life.

5-MINUTE CHARGING **PWR**JUMP*



PWRJUMP™ boosts the battery from 0 to 25% power in 5 minutes giving enough power to blast through up to 100 screws. (Based on 2.0Ah battery)

MOBILE CHARGING PWRASSIST"



Built-in USB port offers convenient, on-the-go charging for mobile devices.



DL6290A-10 PWRCORE 12[™] BRUSHLESS 12V 1/2 IN. DRILL DRIVER KIT WITH **PWR**JUMP™ CHARGER



Features

-) 1/2-INCH SINGLE-SLEEVE, KEYLESS CHUCK For fast, easy bit changes
- VARIABLE SPEED TRIGGER

Precision speed control

) LED LIGHT

With pre-light and after-glow for maximum visibility

350 INCH-POUNDS OF TORQUE

Brushless motor delivers up to 350 inch-lbs of torque


) 1 INCH SHORTER THAN PREVIOUS GENERATION

Specifications

Speed	0-450/0-1,700 RPM
Torque	350 in-lbs
Chuck Size	1/2 in Keyless Single-Sleeve
Torque Settings	17+1
Tool Size	6.06 x 2.66 x 7.81 in (154 x 67.5 x 198.5 mm)

Includes

Drill Driver 2.0Ah Battery with USB PWRJUMP™ Charger Belt Clip Screwdriving Bit Battery Jacket

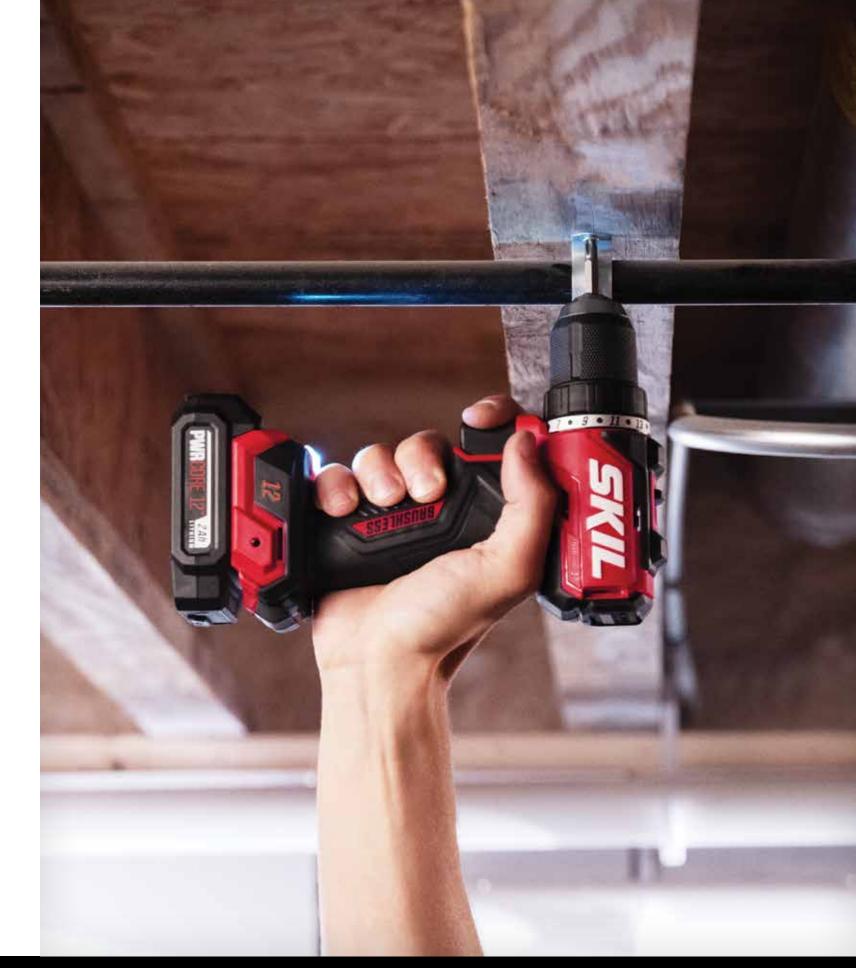











ID6744A-10 PWRCORE 12™ BRUSHLESS 12V 1/4 IN. HEX IMPACT DRIVER WITH **PWR**JUMP™ CHARGER

Features

) HALO LIGHT™

Provides 5X more light than common LEDs, reduces shadows, and lights up your entire workspace for up to

) ONE-HANDED COLLET

Fast and secure bit insertion with one hand

) 3-SPEED SELECTION AND CONTROL MODE

Use lower speed for precise control and higher speed for maximum power

) 1 INCH SHORTER THAN PREVIOUS GENERATION



5-MINUTE CHARGING



Specifications

Speed	1,450/2,100/2,900 RPI
Impact Rate	1,450/3,000/3,600 IPN
Torque	1,500 in-lbs
Tool Size	4.9 x 2.6 x 7.8 in (124 x 67 x 197 mm)

Includes

1/4-inch Hex Impact Driver 2.0Ah Battery with USB

PWRJUMP™ Charge

Belt Clip 2-inch PH2 Bit

Battery Jacket



SR6608A-10 PWRCORE 12™ BRUSHLESS COMPACT DETAIL SANDER KIT

Features

) INTEGRATED DUST BOX

Compact, transparent design improves balance, visibility, and maneuverability while avoiding contact with the battery

COMPACT POWER

Big power in a compact design for working overhead or in hard-to-reach areas

) EASY EMPTYING

Clean out dust box easily, without tools



5-MINUTE CHARGING



Specifications

Speed	12,000 OPM
Pad Size	5-1/4 x 3-11/16 in (133 x 93 mm)
Sanding Orbit Diameter	1/16 in (1.6 mm)
Tool Size	5.4 x 3.8 x 4.7 in

Includes

Compact Detail Sander

2.0Ah Battery with USB PWRJUMP™ Charger

Dust Box

(10) 80 Grit Sandpapers (10) 120 Grit Sandpapers

(10) 180 Grit Sandpapers

(10) 240 Grit Sandpapers

Battery Jacket





IW6744A-10 PWRCORE 12™ BRUSHLESS 12V 3/8 IN. IMPACT WRENCH WITH BATTERY AND **PWR**JUMP™ CHARGER

Features

) HALO LIGHT™

Provides 5X more light than common LEDs, reduces shadows, and lights up your entire workspace for up to 10

) 3/8-INCH ANVIL WITH FRICTION RING

For quick and easy socket changes

) 3-SPEED SELECTION AND REVERSE CONTROL MODE

Use lower speed for precise control and higher speed for maximum power

) 1 INCH SHORTER THAN PREVIOUS GENERATION



5-MINUTE CHARGING



Specifications

Anvil with Friction Ring	3/8 in
Fastening Torque	125 ft-lbs
Breakaway Torque	200 ft-lbs
Speed	1,700/2,200/2,500 RPM
Impact Rate	2,000/3,200/3,400 IPM
Tool Size	4.80 x 2.64 x 7.76 in (122 x 67 x 197 mm)

Includes

Battery Jacket

3/8-inch Impact Wrench 2.0Ah Battery with USB PWRJUMP™ Charge Belt Clip



CR541802 PWRCORE 12™ BRUSHLESS 12V 5-1/2 IN. CIRCULAR SAW WITH 4.0AH BATTERY AND **PWR**JUMP™ CHARGER

Features

COMPACT SIZE

The digital brushless motor provides compact, lightweight power

) 0-50° BEVEL CAPACITY

Easily cut a variety of angles

) 18-TOOTH CARBIDE BLADE For fast and clean cuts

) ELECTRIC BRAKE

Stops blade quickly







Specifications

Blade Size	5-1/2 in
Speed	4,200 RPM
Bevel Capacity	0-50°
Cutting Depth (90°)	1-5/8 in
Cutting Depth (45°)	1-3/16 in
Tool Size	10.9 x 6.5 x 9.6 in

Includes

Circular Saw

4.0Ah **PWR**ASSIST™ Battery

PWRJUMP™ Charger

18T Thin Kerf Carbide Wood Cutting

Blade Allen Key

Vacuum Adapter

Battery Jacket

HD6290A-10 PWRCORE 12™ BRUSHLESS 12V 1/2 IN HAMMER DRILL KIT WITH **PWR**JUMP™ CHARGER

Features

) THREE FUNCTIONS IN ONE

Easily transition between hammer drill, drill, and screwdriver modes) 1/2-INCH KEYLESS RATCHETING CHUCK

For fast, easy bit changes

) LED LIGHT

With pre-light and after-glow for maximum visibility

) 1 INCH SHORTER THAN PREVIOUS GENERATION







Specifications

Keyless Racheting Chuck	1/2 in
Torque	350 in-lbs
Speed	0-450/0-1,700 RPM
Impact Rate	0-6,750/0-25,500 IPM
Clutch Setting	17+1+1

Includes

Belt Clip

Hammer Drill 2.0Ah Battery with USB

PWRJUMP™ Charger

Screwdriving Bit

Battery Jacket

OS592702 PWRCORE 12™BRUSHLESS 12V OSCILLATING MULTITOOL KIT WITH BATTERY AND **PWR**JUMP™ CHARGER

QUICK RELEASE LEVER

For fast and convenient accessory changes

) HALO LIGHT™

5X brighter light than common LEDs and reduces shadows

) COMPACT SIZE

The digital brushless motor provides compact, lightweight power







Specifications

Interface for Accessories	12-pin OIS
Oscillating Angle	3.6°
Variable 6 Speed Dial	11,000-18,000 OPM
Length	11 in

Includes

Multi-Tool 2.0Ah **PWR**ASSIST™

PWRJUMP™ Charger 35pcs Sanding Paper Sanding Pad

HCS Wood Blade **HCS Segment Blade** Rigid Scraper Battery Jacket

13

Bi-metal Plunge

Blade















RI574502 PWRCORE 12™ BRUSHLESS 12V 1/4 IN. HEX RIGHT ANGLE IMPACT DRIVER WITH BATTERY AND **PWR**JUMP™ CHARGER

) 900 INCH-POUNDS OF TORQUE

The power to drive large fasteners and bolts

90° ANGLED HEAD

Compact head is ideal for tight spaces

) HALO LIGHT™

5X brighter light than common LEDs and reduces shadows

) 1/4-INCH COLLET

For easy bit changes







Specifications

Chuck	1/4 in Hex Collet
Torque	900 in-lbs
Speed	0-2,700 RPM, 0-3,750 IPM
Length	12.3 in
Tool Size	2.6 x 2.7 x 12.3 in

Includes

Right Angle Impact 2.0Ah PWRASSIST™

PH2 Bit Belt Clip Battery Jacket

PWRJUMP™ Charger





JS5833A-10 PWRCORE 12™ BRUSHLESS 12V COMPACT JIGSAW KIT WITH BATTERY AND **PWR**JUMP™ CHARGER **Features**

COMPACT DESIGN

Greater control for detail wood cutting

) HALO LIGHT™

5X more light common LEDs

) 4-STAGE ORBITAL

Cut through a variety of materials with ease

) TOOL-FREE BLADE CLAMP

Replace T- or U-Shank saw blades in a matter of seconds



5-MINUTE CHARGING



Specifications

Stroke Distance	7/8 in (22 mm)
Speed	800-3000 SPM
Bevel	0°, ± 15°, ± 30°, ± 45°
Tool Size	8.4 x 2.7 x 7 in (213 x 69 x 179 mm)

Includes

Jigsaw

2.0Ah **PWR**ASSIST™ Battery

PWRJUMP™ Charger

Wood Cutting Blade

Metal Cutting Blade

Battery Jacket

Allen Wrench



RS582802 PWRCORE 12™ BRUSHLESS 12V COMPACT RECIPROCATING SAW WITH BATTERY AND **PWR**JUMP™ CHARGER

Features

) TOOL-FREE BLADE CHANGE

For quick blade changes

) 3/4-INCH STROKE

For fast and clean cuts

VARIABLE SPEED CONTROL Precision speed control

) PIVOTING SHOE

Create smoother cuts and minimizes vibration







Specifications

Stroke	3/4 in (18 mm)
Speed	0-3,000 SPM
Tool Size	12-3/4 x 2-3/4 x 5-1/2 in

Includes

Compact Recip Saw

2.0Ah **PWR**ASSIST™ Battery

PWRJUMP™ Charge Wood Cutting Blade

Battery Jacket



ES4651A-00 PWRCORE 12[™] 12V MULTI-CUTTER, TOOL ONLY

) 1/4-INCH CUTTING CAPACITY

Cuts a variety of materials like cardboard, carpet, leather,

) SELF-SHARPENING BLADE

Provides more precise and efficient cutting

) COMPACT SIZE

Lightweight and ergonomic handle design reduces user fatigue

) LOCK-OFF SWITCH

Prevents accidental startups

Specifications

Speed	300 RPM
Max Cutting Thickness	1/4 in (6 mm)
Blade Size	1-9/16 in (40 mm)
Tool Size	9-17/32 x 4-1/4 in x 2-23/32 in

Includes

Multi-Cutter

1-9/16 in. Blade

AH6552A-10 PWRCORE 12™ BRUSHLESS 12V AUTO HAMMER



Features

3-POSITION ADJUSTABLE HEAD

Switch between 0°, 45°, or 90° to hammer nails at a variety of angles for any job

) MAGNETIC COLLET

Holds nails (up to 3.5 inches long) in place for one-handed use, especially in tight, hard-to-reach areas like cabinetry

ED- CHARGE MOBILE DEVICES

) COMPACT SIZE

The digital brushless motor delivers compact, lightweight power for extended tool life and precise hammering control in hard-to-reach areas







Impact rate After-glow

angle

LED light Magnetic sleeve Includes Auto Hammer

Specifications

0°/45°/90°

4200

Yes

Yes

Yes

Up to 3.5 in (2d-16d)

Adjustable head

Drive Capacity

Nail Remover Belt Clip

2.0Ah PWRASSIST™ Battery PWRJUMP™ Charger



AU0225D-11 12V/20V POWER SNAKE DRAIN CLEANER 12V KIT

) UNCLOGS UP TO 2-INCH DRAINS

Clears drains from 3/4 inch to 2 inches in diameter

) AUTO FEED

Engage clutch to extend or retract cable

VARIABLE SPEED TRIGGER

For precise control

) STURDY FOOT BASE For better ergonomics during use

) CLEANING PORT

Drains excess water after use

) 1/4-INCH X 25-FOOT CARBON STEEL CABLE

For extended reach and maximum durability

Specifications

Voltage	12V/20V
No Load Max Drum Spin Speed	0–500 RPM
Clearable Pipe Size	3/4 in – 2 in
Shipment Cable Diameter x Length	1/4 in x 25 ft
Replaceable cable	Yes
Tool Weight	6.4 lb / 2.9 kg
Tool Dimensions	15.3 in x 6.3 in x 8.22 in / 389mm x 160mm x

Includes

12V/20V Power Snake Drain Cleaner PWRCORE 12™ Lithium 2.0Ah 12V Battery

PWRCORE 12™ Charger



RW5763A-10 PWRCORE 12™ BRUSHLESS 12V 3/8 IN. RATCHET WRENCH WITH BATTERY AND **PWR**JUMP™ CHARGER

Features

) COMPACT SIZE

The digital brushless motor provides compact, lightweight power

) POWERFUL TORQUE

Up to 55 foot-pounds of max torque to easily remove or install nuts, bolts, and other fasteners

VARIABLE SPEED TRIGGER

Purpose-built variable speed trigger provides precise speed from 0-220 RPM, delivering optimal control under the hood

Specifications

Anvil Size	3/8 in
Max. Torque	55 ft-lbs
Max. Manual Torque	150 ft-lbs
Speed	220 RPM
Tool Size	15.47 x 2.60 x 2.72 in (393 x 66 x 69 mm)

Includes

Ratchet Wrench 2.0Ah Battery with USB

PWRJump™ Charger

3/8-inch to 1/4-inch Socket Adapter

Battery Jacket





FN0400D-00 12V/20V BRUSHLESS 4 IN. CLAMP FAN. TOOL ONLY

Features

) POWERFUL AIRFLOW Up to 200 CFM

MULTIDIRECTIONAL PIVOTING **AND SWIVELING HEAD**

Sends air where you need it

) INDUSTRIAL THREADED CLAMP Strong holding capacity

) COMPACT SIZE

Built for tight spaces or easy on-the-go use

Specifications

Voltage	12V/20V/USB-C power
Fan Blade Size	4 in
Pivoting Angle	270°
Max. Air Volume	200 CFM
Max. Air Speed	11 MPH
Number of speeds	2
Speed settings	Low/High
Runtime	Up to 14 hr (20V 2.0Ah battery on low) Up to 8.5 hr (12V 2.0Ah battery on low)
Noise Level	54 dB

Includes

12/20V Brushless 4 in. Clamp Fan



IF5943-00 PWRCORE 12[™] 12V INFLATOR, TOOL ONLY

) HIGH PRESSURE MODE WITH AUTO SHUTOFF

Quickly inflates tires, sports equipment, and more-hands free

) 12V TIRE INFLATOR WITH GAUGE

Equipped with digital pressure gauge to set and view PSI in real time

) COMPACT SIZE

Easy to store, and portable size is perfect for the car or garage

) ONBOARD ADAPTER STORAGE

Keeps adapters handy and accessible

Specifications

Pressure	Up to 160 PSI
Hose Length	28 in
Tool Size	7-7/8 x 5-5/8 x 5-3/4 in

Includes

Inflator

Presta Valve Adapter

Sports Ball Needle Pinch Valve Adapter





FN0700D-00 12V/20V BRUSHLESS 7 IN. FAN, TOOL ONLY

Features

) POWERFUL AIRFLOW

Up to 500 CFM

) 180-DEGREE PIVOTING HEAD Sends air where you need it

) VARIABLE SPEED

Adjust the power level to your needs

) BUILT-IN RAFTER HOOK For versatile mounting

Specifications

Voltage	12V/20V/USB-C Power
Fan Blade Size	7 in
Pivoting Angle	180°
Max. Air Volume	500 CFM
Max. Air Speed	14.3 MPH
Speed settings	Variable
Runtime	Up to 3 hr (20V 2.0Ah battery on high); Up to 1.5 hr (12V 2.0Ah battery on high)
Noise Level	50 dB

Includes

12V/20V Brushless 7 in. Fan



RO502601 PWRCORE 12[™] BLUETOOTH 12V SPEAKER, TOOL ONLY

Features

) PORTABLE SPEAKER

This bluetooth speaker's design makes it easy to bring along wherever you go

QUALITY SOUND

Dual passive bass radiators allow for improved bass sound

) LONGER RUNTIME & BATTERY LIFE

Uses the same industry-leading **PWR**CORE 12[™] lithium battery technology as your tools

Specifications

Bluetooth Distance	Up to 100 feet
USB Output	5V, 2.1Amp
Speaker	2.5 in 10W
USB Port	2.1A 5V
Auxiliary Input	3.5 mm

Includes

Speaker AUX Cable



LH2500D-00 12V/20V COMPACT TOWER LIGHT. TOOL ONLY

Features

) FAST, TOOL-FREE SETUP

Flip out the legs and extend the pole without tools

) COMPACT AND LIGHTWEIGHT

Collapses for easy storage and transport

) FOOT CONTROL SWITCH

For hands-free brightness settings

) 270-DEGREE PIVOT + 270-DEGREE SWIVEL For more control to direct light where you need it

) THREE BRIGHTNESS SETTINGS

Choose between 200, 1,000, and 2,500 lumens

Specifications

Voltage	12V/20V
Light Source	LED
Runtime	Up to 9 hours on 1000 lms with 20V 4.0Ah battery; Up to 6 hours on 1000 lms with 12V 4.0Ah battery
Modes	2,500/1,000/200 lm
Rotation	270° Pivot + 270° Swivel
Extended Height	5.2 ft
Collapsed Length	21.65 in

Includes

Compact Tower Light



LH5537A-00 PWRCORE 12[™]12V MECHANICAL LIGHT. TOOL ONLY

Features

) BRIGHTEN YOUR WORKSPACE

Ultra-bright and compact LED light illuminates dark areas with up to 600 lumens, with settings for high, low, or strobe depending on the project

) MULTI-DIRECTIONAL LIGHT

180° pivoting head with 270° left/right swivel provides versatility for lighting

) MULTIPLE HANGING OPTIONS

A built-in metal hook, rafter hook, and magnets that attach to car hood provide utility

Specifications

Brightness Settings	High 600lm, Low 300lm, Strobe 600lm
Lamp Head Rotation	180° vertical range, 270° swivel range
Run Time	High mode for up to 7.5 hours with 4.0Ah battery
Light Source	20 LEDs
Tool Size	14.69 x 3.43 x 2.44 in (373 x 87 x 62 mm)

Includes

12V Mechanical Light



BY500101 PWRCORE 12™ LITHIUM 2.0AH 12V BATTERY WITH **PWR**ASSIST™ MOBILE CHARGING

Features

PWRCORE 12™ LITHIUM TECHNOLOGY

Industry-leading battery technology; 25% longer runtime and 2X longer battery life

PWRASSIST™ MOBILE CHARGING

Utilize USB-A port on the battery to charge other devices

) FUEL GAUGE

LED charge status indicators show how much power is left

Specifications

-	
Battery Type	Rechargeable Lithium-lon
Voltage	12V
Capacity	2.0Ah
USB Port	USB-A, 5V, 1.0A
Compatibility	All SKIL 12V Tools
Fuel Gauge	Green LED
Charger	Only with SKII 12V

Includes

2.0Ah **PWR**ASSIST™ Battery **Battery Jacket**



LH5533-00 PWRCORE 12™ 12V FLOOD LIGHT, TOOL ONLY

Features

) COMPACT AND LIGHTWEIGHT

LED panel work light with ultra-thin head illuminates dark areas with up to 850 lumens for greater visibility

) ILLUMINATION CONTROL

Choose high or low depending on your project

MULTI-POSITION HANDLE

Rotates 180 degrees and can be used as a rafter hook, carrying handle, or stand

Specifications

Two Settings	850 or 550 Lumens
Runtime	Up to 4.5 hours in high setting with SKIL 12V 4.0Ah battery
Pivoting Angles:	7 handle positions from 0-180°
Weight	1.51 lbs (0.69 kg)

Includes

Flood Light



BY519801 PWRCORE 12™ LITHIUM 4.0AH 12V BATTERY WITH **PWR**ASSIST™ MOBILE CHARGING

Features

PWRCORE 12™ LITHIUM

Industry-leading battery technology; 25% longer runtime and 2X longer battery life

PWRASSIST™ MOBILE CHARGING

Utilize USB-A port on the battery to charge other devices

) FUEL GAUGE

LED charge status indicators show how much power is left

Specifications

Battery Type	Rechargeable Lithium-lon
Voltage	12V
Capacity	4.0Ah
USB Port	USB-A, 5V, 1.0A
Compatibility	All SKIL 12V Tools
Fuel Gauge	Green LED
Charger	Only with SKIL 12V

Includes

4.0Ah **PWR**ASSIST™ Battery **Battery Jacket**



QC535701 PWRCORE 12™ **PWR**JUMP™ CHARGER

PWRJUMP™ CHARGING

Charges up to 25% in just 5 minutes* for enough power to drive up to 100 screws

) BATTERY CHARGE STATUS INDICATORS

-) USB PORT TO CHARGE OTHER DEVICES
-) TABLE OR WALL MOUNTING

Based on 2.0 Ah battery

Specifications

Input Voltage	120V
Input Power	90W
USB Port	5V, 1.0A Output
Compatibility	All SKIL 12V Tools

Includes

PWRJUMP™ Charger





AVAILABLE COMBO KITS	DESCRIPTION	INCLUDED ITEMS
	CB737501 PWR CORE 12 [™] BRUSHLESS 12V 1/2 IN. DRILL DRIVER & LASER MEASURER KIT WITH PWR JUMP [™] CHARGER	Drill Driver 2.0Ah PWRASSIST™ Battery PWRJUMP™ Charger Belt Clip PH2 Bit Laser Distance Measurer & Level Soft Bag Micro USB Charging Cord
	CB736701 PWRCORE 12™ BRUSHLESS 12V DRILL DRIVER & IMPACT DRIVER KIT WITH PWRJUMP™ CHARGER	Drill Driver PWRJUMP™ Charger Impact Driver (2) PH2 Bits (2) 2.0Ah (2) Belt Clips PWRASSIST™ Batteries
	CB742701 PWR CORE 12 [™] BRUSHLESS 12V DRILL DRIVER AND CIRCULAR SAW KIT WITH PWR JUMP [™] CHARGER	Drill Driver Circular Saw 4.0Ah PWR ASSIST™ Battery PWRJUMP™ Charger 18T Thin Kerf Carbide Wood Cutting Blade Allen Key Vacuum Adapter PH2 Bit Belt Clip Battery Jacket
	CB742901 PWR CORE 12™ BRUSHLESS 12V DRILL DRIVER & IMPACT DRIVER KIT WITH PWR JUMP™ CHARGER	Drill Driver (2) PH2 Bits Impact Driver (2) Belt Clips 2.0Ah PWR ASSIST™ Battery Battery PWRJUMP™ Charger
	CB737601 PWR CORE 12 [™] BRUSHLESS 12V 1/2 IN. DRILL DRIVER & 12 IN. DIGITAL LEVEL KIT WITH PWR JUMP [™] CHARGER	Drill Driver Belt Clip 12 in Digital Level Soft Case 12V Battery (2) AAA Batteries PWRJUMP™ Charger Battery Jacket PH2 Bit
	CB743001 PWR CORE 12 [™] BRUSHLESS 12V DRILL DRIVER & RIGHT ANGLE IMPACT DRIVER KIT WITH PWR JUMP [™] CHARGER	Drill Driver (2) PH2 Bits Right Angle Impact (2) Belt Clips Driver Battery Jacket 2.0Ah PWRASSIST™ Battery PWRJUMP™ Charger
	CB7431-10 PWR CORE 12 [™] BRUSHLESS 12V 3-TOOL COMBO KIT WITH PWR JUMP [™] CHARGER	Drill Driver Belt Clip Inflator PH2 Bit Area Light Presta Valve Adapter 2.0Ah Battery Sports Ball Needle with USB Pinch Valve Adapter PWRJUMP™ Charger Battery Jacket
	CB7490A-20 PWR CORE 12™ BRUSHLESS 12V 4-TOOL COMBO KIT WITH PWR JUMP™ CHARGER	Drill Driver Circular Saw Reciprocating Saw Area Light 2.0Ah and 4.0 Ah Battery with USB PWRJUMP™ Charger Belt Clip PH2 Bit Ned Carbide Wood Cutting Blade Vacuum Adaptor Wood Cutting Blade (2) Battery Jackets Soft Bag

AVAILABLE COMBO KITS	DESCRIPTION	INCLUDED ITEMS
	CB7368A-20 PWR CORE 12 [™] BRUSHLESS 12V 5-TOOL COMBO KIT WITH TWO BATTERIES AND CHARGER	Drill Driver (2) PH2 Bits Multi-Tool (2) Belt Clips Impact Driver 10 pcs Sanding Paper Area Light Sanding Pad Bluetooth Speaker Bi-Metal Plunge Blade Speaker AUX Cable Standard Charger (2) Battery Jackets
	CB8429A-10 PWR CORE 12 [™] BRUSHLESS 12V DRILL DRIVER & IMPACT DRIVER KIT WITH PWR JUMP™ CHARGER	Drill Driver Impact Driver 2.0Ah Battery with USB PWRJUMP™ Charger (2) PH2 Bits (2) Belt Clips Battery Jacket
	CB738701 PWR CORE 12 [™] BRUSHLESS 12V 3-TOOL COMBO KIT WITH BATTERY AND CHARGER	Drill Driver 10 pcs Sanding Multi-Tool Paper Area Light Sanding Pad 2.0Ah Battery Bi-Metal Charger Plunge Blade PH2 Bit Belt Clip
	CB738701 PWR CORE 12 [™] BRUSHLESS 12V 4-TOOL COMBO KIT WITH TWO BATTERIES AND CHARGER	Drill Driver 10 pcs Sanding Paper Multi-Tool Sanding Pad Area Light Bi-Metal Plunge Blade Bluetooth Speaker Speaker AUX Cable (2) 2.0Ah Batteries Charger PH2 Bit Belt Clip
	CB736801 PWR CORE 12™ BRUSHLESS 12V 5-TOOL COMBO KIT WITH TWO BATTERIES AND CHARGER	Drill Driver (2) Belt Clips Multi-Tool 10 pcs Sanding Paper Impact Driver Sanding Pad Area Light Bi-Metal Plunge Blade Bluetooth Speaker Speaker AUX Cable (2) 2.0Ah Batteries (2) Battery Jackets Charger (2) PH2 Bits
	CB7434-21 PWRCORE 12™ BRUSHLESS 12V 6-TOOL COMBO KIT WITH TWO BATTERIES AND CHARGER	Drill Driver Circular Saw Wood Cutting Blade Right Angle Impact Driver Wacuum Adapter Multi Tool Cordless Inflator Area Light 2.0Ah Battery with USB 4.0Ah Battery with USB PWRJUMP™ Charger (2) Belt Clips (2) PH2 Bits Wood Cutting Blade Allen Key Vacuum Adapter (10) pcs Sanding Paper Sanding Pad Bi-Metal Plunge Blade Presta Valve Adapter Sports Ball Needle Pinch Valve Adapter (2) Battery Jackets

BORE 20th

This lineup offers a range of tools, plus the benefits of our patented **PWR**CORE 20[™] lithium battery.





ADVANCED BATTERY TECHNOLOGY PWRCORE 20"



Industry-leading battery technology wraps each cell with cooling material to keep the battery powering on for 25% longer runtime and 2X battery life.

5-MINUTE CHARGING auto**PWR**JUMP**



autoPWRJUMP™ boosts the battery from 0 to 25% power in 5 minutes for enough power to blast through up to 100 screws. (Based on 2.0Ah battery)

MOBILE CHARGING PWRASSIST



Built-in USB port offers convenient, on-the-go charging for mobile devices.





CR5429B-20 PWRCORE 20™ BRUSHLESS 2 X 20V 7-1/4 IN. REAR HANDLE CIRCULAR SAW KIT WITH TWO 5.0 AH BATTERIES AND auto**PWR**JUMP™ CHARGER

Features

) 2 X 20V POWER

Two **PWR**CORE 20[™] batteries simultaneously power this saw for demanding applications (always use 5Ah batteries or higher)

CUTS 3X IN ONE PASS

2-9/16 inch depth of cut powers through tough materials

) UP TO 600 CUTS ON A SINGLE CHARGE*

No down time - two fully charged **PWR**CORE 20™ 5.0Ah Lithium batteries will make 600 cuts in 2x4 pine





Specifications

Battery Requirement	2x20V
Speed	5,300 RPM
Max Cutting Capacity	2-9/16 in
Bevel Capacity	0-53°

Includes

2x20V Circular Saw (2) 5.0Ah Batteries 24 Tooth Carbide-Tipped Blade Wrench (Stored on Tool)

auto**PWR**JUMP™ Vacuum Adapter

150W Dual Port

* Based on lab testing, up to 600 crosscuts in 2x4



DL527502 PWRCORE 20™20V 1/2 IN. DRILL DRIVER KIT WITH **PWR**CORE 20™ LITHIUM BATTERY

Features

) 1/2-INCH SINGLE-SLEEVE, KEYLESS CHUCK For fast and easy bit changes

Turns on with trigger, stays lit for 10 seconds after

) CHOOSE YOUR SPEED SETTING

Set to high speed for efficiency and low speed for higher torque

) FORWARD/REVERSE LED INDICATOR

Check driving direction at a glance

Specifications

Chuck	1/2 in Keyless with Auto Spindle Lock
Two Speed Settings	Low 0-420, High 0-1,450 RPM
Torque Settings	17 Settings + Drill Mode
Torque	350 in-lbs
Light	LED
LED Indicator	Forward/Reverse
Lenath	7-7/16 in (189 mm)

Includes

Drill Driver PH2 Bit 2.0Ah Battery Belt Clip

Standard Charger



® BRUSHLESS

CR5440B-10 PWRCORE 20™ BRUSHLESS 20V 7-1/4 IN. CIRCULAR SAW KIT WITH 4.0 AH BATTERY AND auto**PWR**JUMP™CHARGER

) BEST-IN-CLASS CUTTING PERFORMANCE

Makes 350 cuts in 2x4 pine with a PWRCORE 20™

) CUTS 3X IN ONE PASS

25% LONGER RUNTIME

Powers through tough materials with 2-5/8-inch depth of cut

) DURABLE CONSTRUCTION

Cast aluminum guards and shoe provide reliable performance and durability

5-MINUTE CHARGING

Specifications

Battery Requirement	20V
Speed	5,300 RPM
Max Cutting Capacity	2-5/8 in
Bevel Capacity	0-56°

Includes

Circular Saw 4.0Ah **PWR**CORE 20™ auto**PWR**JUMPTM

Vacuum Adapter Hex Key

7-1/4 in 24T Blade





HD6294B-10 PWRCORE 20™BRUSHLESS 20V 1/2 IN. COMPACT HAMMER DRILL KIT WITH auto**PWR**JUMP™CHARGER

) 1/2-INCH SINGLE-SLEEVE, KEYLESS **RATCHETING CHUCK**

For fast and easy bit changes

) 17-STAGE TORQUE ADJUSTMENT AND VARIABLE SPEED TRIGGER

17 settings and precision speed control for all applications

LED WORKLIGHT

Illuminates your entire work space for up to 10 minutes

) 1 INCH SHORTER THAN PREVIOUS GENERATION

PWRCORE 20

MAXIMIZED POWER. MINIMIZED SIZE.

Specifications

Chuck	1/2 in Keyless Metal Ratcheting
Torque	450 in-lbs
Speed	0-500/0-1,800 RPM
Impact Rate	0-7,500/0-27,000 IPM
Clutch Settings	17+1+1
Tool Size	6.6 x 2.7 x 7.8 in (166 x 67.3 x 198.5 mm)

Includes

Hammer Drill 2.0Ah **PWR**ASSIST™ auto**PWR**JUMPTM

Belt Clin Screwdriving Bit Battery Jacket









DL6293B-10 PWRCORE 20™ BRUSHLESS 20V 1/2 IN. COMPACT DRILL DRIVER KIT WITH auto**PWR**JUMP™ CHARGER

) 1/2-INCH SINGLE-SLEEVE, KEYLESS CHUCK For fast, easy bit changes

) 17-STAGE TORQUE ADJUSTMENT PLUS DRILL MODE

17 settings and precision speed control for all applications

) LED WORKLIGHT

Illuminates your entire work space for up to 10 minutes

) 1 INCH SHORTER THAN PREVIOUS GENERATION

PWR CORE 20™	
T TETROUTE LU	
+COMPACT	

MAXIMIZED POWER, MINIMIZED SIZE.

Specifications

Chuck	1/2 in Keyless Ratcheting
Torque	450 in-lbs
Speed	0-500/0-1,800 RPM
Clutch Setting	17+1
Tool Size	6.1 x 2.7 x 7.8 in (154 x 67.3 x 198.5 mm)

Includes

Drill Driver 2.0Ah Battery with USB autoPWR.IUMP™

Screwdriving Bit Battery Jacket

Belt Clip



HD527802 PWRCORE 20™ 20V 1/2 IN. HAMMER DRILL KIT WITH **PWR**CORE 20™ 2.0AH LITHIUM BATTERY

Features

3-IN-1 MULTI-FUNCTION

Quickly transition between hammer, drill, and screwdriver mode to save time

) CHOOSE YOUR SPEED SETTING

Set to high speed for better efficiency and low speed for higher torque

) EASY BIT CHANGES

1/2-inch keyless chuck with auto spindle lock allows for quick bit changes

Specifications

Variable Speed	Low 0-420, High 0-1,450 RPM
Impact Rate	0-6,300/0-21,750 IPM
Max Torque	350 in-lbs
Chuck	1/2 in Keyless Ratcheting
Torque settings	17 plus Hammer Drill and Screwdriver Modes
Length	7-7/8 in (201 mm)

Includes

20V 2.0Ah Battery Standard Charger

2-inch Double-End PH2 Bit Belt Clip





ID6739B-10 PWRCORE 20™BRUSHLESS 20V 1/4 IN. HEX COMPACT IMPACT DRIVER WITH BATTERY AND auto**PWR**JUMP™CHARGER

Features

) CONTROL MODE

Helps eliminate screw cam-out and cross threading

) 3 SPEED SELECTION

Use lower speed for precise control and higher speed for maximum power

) HALO LIGHT™

Brightens your entire workspace for up to 10 minutes

) 1 INCH SHORTER THAN PREVIOUS GENERATION

PWR C0	ORE	20
+COMPACT		

MAXIMIZED POWER. MINIMIZED SIZE.

CHARGE MOBILE DEVICES

5-MINUTE CHARGING

Specifications

Collet	1/4 in Hex Collet
Torque	1,800 in-lbs
Speed	1,800/2,500/3,100 RPM
Impact Rate	2,450/3,400/3,950 IPM
Tool Size	4.88 x 2.64 x 7.80 in (124 x 67 x 198 mm)

2-inch PH2 Bit

Includes

1/4-inch Hex Impact Driver 2.0Ah **PWR**ASSIST™ Battery

auto**PWR**JUMP™





IW6739B-10 PWRCORE 20™ BRUSHLESS 20V 3/8 IN. COMPACT IMPACT WRENCH KIT WITH 2.0AH BATTERY AND auto**PWR**JUMP™ CHARGER

Features

) 3/8-INCH ANVIL WITH FRICTION RING

For quick and easy socket changes

) 3 SPEED SELECTION

Use lower speed for precise control and higher speed for maximum power

) HALO LIGHT™

Brightens your entire workspace for up to 10 minutes

) 1 INCH SHORTER THAN PREVIOUS GENERATION

PWRCORE 20™ M

MAXIMIZED POWER. MINIMIZED SIZE.

CHARGE MOBILE DEVICES

5-MINUTE CHARGING Bat

Specifications

=	
Anvil with Friction Ring	3/8 in
Fastening Torque	170 ft-lbs
Nut Busting Torque	220 ft-lbs
Speed	1,500/2,250/2,850 RPM
Tool Size	4.8 x 2.6 x 7.8 in

Includes

3/8-inch Compact Impact Wrench
2.0Ah **PWR**ASSIST™ Battery

auto**PWR**JUMP™ Charger

Belt Clip

Battery Jacket



® BRUSHLESS

ID572702 PWRCORE 20™20V 1/4 IN. HEX IMPACT DRIVER KIT WITH **PWR**CORE 20™ LITHIUM BATTERY

Foaturos

) 1/4-INCH HEX COLLET

Fast, easy bit changes

) LED LIGHT

Turns on with trigger, stays lit for seconds after release

) VARIABLE SPEED CONTROL

Full control for a variety of projects

) FORWARD/REVERSE LED INDICATOR Check driving direction at a glance

Specifications

Collet	1/4 inch Hex
Speed	0-2,500 RPM
Trigger	Variable Speed
Torque	1,100 in-lbs
LED Indicators	Forward/Reverse
Light	LED
Length	6 in (152 mm)

PH2 Bit

Belt Clip

Includes

Impact Driver 2.0Ah Battery

Standard Charger





IW5739-1A PWRCORE 20[™] BRUSHLESS 20V 1/2 IN. IMPACT WRENCH KIT WITH 5.0AH BATTERY AND auto**PWR**JUMP[™] CHARGER

Features

) POWERFUL PERFORMANCE

The digital brushless motor provides efficient, highperformance power for use on lug nuts and tough automotive bolts

) THREE SPEED SETTINGS

Choose between High, Low, and Reverse Control Mode

) REVERSE CONTROL MODE

Stops rotations and impacts once the fastener is loosened



E CHARGING



Specifications

Anvil with Friction Ring	1/2 in
Torque	200 ft-lbs
Speed	0-2,100/0-2,400 RPM
Impact Rate	0-2,800/0-3,200 IPM
Tool Size	6.2 x 2.8 x 8.0 in (158 x 72 x 202 mm)

Includes

Impact Wrench 2.0Ah Battery

auto**PWR**JUMP™ Charger

Belt Clip

PWRASSIST™ USB Adapter

PWR:ORE 20



IW5761B-10 PWRCORE 20™BRUSHLESS 20V 1/2 IN. MID-TORQUE IMPACT WRENCH KIT

Features

) HIGH POWER

800 foot-pounds of nut-busting torque, 480 foot-pounds of fastening torque

) 1/2-INCH ANVIL WITH FRICTION RING For quick and easy socket changes

) THREE SPEED SELECTION

Use lower speed for precise control and higher speed for maximum power

NUT BUSTING MODE

Provides up to 800 foot-pounds of breakaway torque to remove rusted nuts and bolts

Specifications

No Load Speed	0-800/1,400/ 1,900 RPM
Max. Impact Rate	0-1,100/2,000/ 2,600 IPM
Anvil Size	1/2 in
Fastening Torque	200/300/480 ft lbs
Nut-Busting Torque	650/800 ft-lbs (on Nut Busting Mode)
Torque Settings	3
Anvil Type	Friction Ring

Includes

Impact Wrench
4.0Ah **PWR**ASSIST™ Battery
auto**PWR**JUMP™ Charger





NA1800B-10 PWRCORE 20™ BRUSHLESS 20V 18GA BRAD NAILER KIT

Features

) DRY FIRE LOCKOUT

Eliminates blank firing and prevents damage to work surface

) QUICK DEPTH ADJUSTMENT WHEEL Easily sets ideal nailing depth

) RAPID FIRE

Drives up to two nails per second with minimal ramp-up time

) DUAL LED LIGHTS

Increases visibility in dimly lit work areas



2X BATTERY LIFE



Specifications

Nail Size	18 Ga x 5/8 in
	to 2-1/8 in LG
Drive Mechanism	Pneumatics
Firing Mode	Bump & Sequential
Magazine Capacity	Up To 105 Nails
Tool Size	11.3 in x 10.6 in x
	3.7 in

Includes

18 Ga Brad Nailer SKIL 2.0Ah Lithium USB-C Battery SKIL 45W USB-C PD Charger Belt Clip Cable

(100) 18 Ga 2 in Nails (2) No Mar Tips

Battery Jacket

Hex Key

27









Features

VIBRATION REDUCTION SYSTEM (VRS)

Innovative isolated motor design offers 90% less vibration, helping you work more comfortably (compared to SKIL models without VRS feature)

) POWERFUL PERFORMANCE

The digital brushless motor provides efficient, high-performance power for longer tool life

) CONSTANT SPEED TECHNOLOGY

Innovative SKIL brushless motor communicates with the **PWR**CORE 20[™] battery to maintain consistent speed through harder cuts







Specifications

	nterface for Accessories	12-pin OIS
Η,	D 111 - 11 A 1 -	2.20
1	Oscillating Angle:	3.6°
١	/ariable 6 Speed Dial	11,000-17,000 OPM
L	₋ight	LED
L	ength	12-1/6 in (309 mm)
_		

Includes

Multi-Tool
2.0Ah PWR ASSIST Battery
auto PWR JUMP™ Charger
35 pcs Sanding

Sanding Pad

Paper

HCS Wood Blade **HCS Segment Blade** Rigid Scraper Accessories Case **Battery Jacket**

Bi-Metal Blade



RH170202 PWRCORE 20™20V ROTARY HAMMER KIT WITH **PWR**CORE 20™ LITHIUM BATTERY

MULTI-FUNCTION CHUCK

Compatible with SDS Plus drilling bit and 1/4-inch hex bit

DIRECTION INDICATORS

Forward/reverse LED indicator to determine driving direction

) THREE TOOLS IN ONE

Combines hammer drill, drill, and screwdriver into one tool

) POWERFUL PERFORMANCE

Hammers through materials like concrete and masonry

Turns on with trigger, stays lit for 10 seconds after release

Specifications

Speed	0-900 RPM
Impact Rate	0-5,000 IPM
Impact Force	0.7 ft-lbs (1J)
Multi-function Chuck	For SDS, SDS+ and 1/4 in Hex Bits
Solid Bit Capacity	1/2 in

Includes

Rotary Hammer 2.0Ah Battery

Standard Charger 1x75mm Bit Holder

OS593002 PWRCORE 20™20V OSCILLATING MULTITOOL KIT WITH **PWR**CORF 20™ 2.0AH LITHIUM BATTERY

) 3.6 DEGREE OSCILLATING ANGLE

High-performance cutting, sanding, and scraping

) ERGONOMIC DESIGN

Balanced and easy to handle

LED LIGHT

See work more clearly

) VARIABLE SPEED DIAL

Choose the speed based on your project

Specifications

Interface for Accessories	12-pin OIS
Oscillating Angle	3.6 Degrees
Variable 6 Speed Dial	11,000-16,000 OPM
Light	LED
Length	12-1/2 in (318 mm)

Includes

Oscillating Multi-Tool 2.0Ah Battery Standard Charger Sanding Paper: (14) 60 grit, (14) 120 grit

Sanding Pad HCS Wood Blade HCS Segment Blade Rigid Scraper Hex Key



CR5413-1A PWRCORE 20™ BRUSHLESS 20V 6-1/2 IN. CIRCULAR SAW KIT WITH 4.0 AH BATTERY AND auto**PWR**JUMP™ CHARGER

Features

DIGITAL BRUSHLESS MOTOR

Provides efficient, high-performance power for extended tool life

0-50 DEGREE BEVEL CAPACITY

Easily achieve the most commonly cut angles

) DEPTH ADJUSTMENT LEVER

For quick depth adjustment

) LED LIGHT WITH PRELIGHT & AFTERFLOW

See work clearly







Specifications

Blade	6-1/2 in (165 mm)/24T
Speed	5,400 RPM
Bevel Capacity	0-50°
Cutting Depth at 90°	2-13/32 in (61 mm)
Cutting Depth at 45°	1-11/16 in (43 mm)
Tool Size	12-5/8 x 10-3/8 x 6 in (320 x 260 x 150 mm)

Includes

Circular Saw 4.0Ah Battery Auto **PWR**JUMP™ Charger **PWR**ASSIST^{TN}

Carbide Blade

24T Ultra Thin Allen Kev

Allen Key

Carbide Blade **Dust Extractor**

Vacuum Adapto



BRUSHLESS

RH1704-1A PWRCORE 20™ BRUSHLESS 20V 7/8 IN. ROTARY HAMMER KIT WITH 5.0AH BATTERY AND auto**PWR**JUMP™CHARGER

) DIGITAL BRUSHLESS MOTOR

Provides efficient, high-performance power when drilling through tough surfaces like brick, concrete, and other

) 4-MODE SELECTOR

Transition between drill, hammer drill, chisel, and chisel alignment settings, reducing time and increasing efficiency

OUICK BIT CHANGES

SDS Plus Chuck allows for easy and secure bit changes to keep your project going







Specifications

Chuck	SDS Plus
Impact Energy	1.5 ft-lbs / 2.0J
Speed	0-1,400 RPM
Impact Rate	0-4,500 IPM
Drilling Capacity	7/8 in
Tool Size	11.18 x 3.15 x 7.80 in (284 x 80 x 198 mm)

Includes

Rotary Hammer 5.0Ah Battery Depth Rod Side Handle

Auto **PWR**JUMP™ PWRASSIST **USB** Adapter



® BRUSHLESS

CR540602 PWRCORE 20™20V 6-1/2 IN. CIRCULAR SAW KIT WITH **PWR**CORE 20™ LITHIUM BATTERY

Features

BEVEL ADJUSTMENT

0-50 degree bevel cut capacity

) DEPTH ADJUSTMENT LEVER

) LED LIGHT

See the cut line more clearly

For quick depth adjustment

) SAW LINE VISOR

Helps keep the cut straight

) LOCK-OFF LEVER

For enhanced safety

Specifications

Speed	4,500 RPM
Bevel Capacity	Up to 50 Degrees
Max Depth of Cut	2-1/8 in at 90 Degrees
Blade Type	Thin-Kerf, 24-Tooth, Carbide-Tipped
Visor	Saw Line
Light	LED

Includes

Circular Saw Standard Charger 2.0Ah Battery Allen Key 6-1/2 in Blade Vacuum Adaptei



















CR5435B-10 PWRCORE 20™BRUSHLESS 20V 4 -1/2 IN. COMPACT

Features

CUTS 2X IN ONE PASS

Cut 2x material at 90 degrees and 1x material at 45 degrees

COMPACT POWER

Big power in a compact design, for working overhead or in hard to reach areas

) LIGHTWEIGHT

38 percent lighter for easy maneuverability (As compared to SKIL CR5413-1A)

) INTEGRATED DUST PORT

Directs sawdust away from the work area

	PW	R	30	RE	20
4	⊢CUW	DAC	Г		

MAXIMIZED POWER, MINIMIZED SIZE,

5-MINUTE

Specifications

Speed	6,000 RPM
Blade Size	4-1/2 in
Arbor Size	3/8 in
Bevel Capacity	45°
Depth of Cut @ 90°	1-1/2 in
Depth of Cut @ 45°	1-1/8 in

Includes

Circular Saw 2.0Ah **PWR**ASSIST Battery auto**PWR**JUMPTM

Vacuum Adapte

Allen Key 4-1/2 in. 24T Carbide Tipped Blade Rip Fence **Battery Jacket**





RS5884-1A PWRCORE 20™ BRUSHLESS 20V RECIPROCATING SAW KIT WITH 4.0AH BATTERY AND auto**PWR**JUMP™ CHARGER

Features

POWERFUL PERFORMANCE

The digital brushless motor provides efficient, high-performance power for longer tool life

) CONTROL YOUR CUTS

Switch between linear mode for cleaner cuts and orbital mode for more aggressive cuts

) PIVOTING ADJUSTABLE SHOE

Extend the blade life and control the depth of cut

) TOOL-FREE BLADE CHANGES

Spindle lock allows for quick and secure blade changes



5-MINUTE CHARGING

E CHARGE MOBILE DEVICES

Specifications

•	
Speed	0-3,000 SPM
Stroke Distance	1-1/8 in (29 mm)
Tool Size	17 x 3.75 x 6.5 in (430 x 96 x 165 mm)
Weight	6.28 lbs (2.85 kg)

Includes

Reciprocating Saw

4.0Ah Battery without USB

auto**PWR**JUMP™ Charger

PWRASSIST™ USB Adapter

Wood Cutting Blade



JS820202 PWRCORE 20™ BRUSHLESS 20V JIGSAW KIT WITH BATTERY AND auto**PWR**JUMP™CHARGER

Features

) VARIABLE TRIGGER WITH BRAKE

Allows for maximum control and a precise finish

) TOOL-FREE BEVEL ADJUSTMENT

Quickly adjusts for angled cutting) 4-STAGE ORBITAL FUNCTION

Smooth cutting ability across different materials and applications with up to 3,000 strokes per minute

) TOOL-FREE BLADE CLAMP

For quick and secure blade changes



5-MINUTE CHARGING



Specifications

Speed	0-3,000 SPM
Stroke	1 in
Blade Compatibility	U-Shank and T-Shank Blades
Bevel Adjustment	Up to 45 Degrees
Tool Size	8-3/8 x 2-9/10 x 8-1/5 in

Includes

Jig Saw 2.0Ah **PWR**ASSIST™ auto**PWR**JUMP Charger

Wood Blade Metal Blade





RS5825B-10 PWRCORE 20™BRUSHLESS 20V COMPACT RECIPROCATING SAW WITH BATTERY AND auto**PWR**JUMP™CHARGER

Features

COUNTERBALANCE GEAR BOX & PIVOTING SHOE

Maximum precision and control with reduced vibration to perform smooth, clean cuts


VARIABLE SPEED TRIGGER

Provides maximum precision and control

DUAL LED LIGHTS WITH PRE-LIGHT

AND AFTER-GLOW

Top LED illuminates an upper surface when cutting pipes while lower LED casts a vertical line when cutting walls or vertical board







Specifications

Stroke Length	1 in
SPM	0-3,000
Tool Size	13.6 x 2.9 x 6 in (345 x 73 x 153 mm)
Weight	5.0 lbs (2.27 kg)

Includes

Compact Reciprocating Saw 2.0Ah Battery with USB auto**PWR**JUMP™ Charger Wood Cutting Blade **Battery Jacket**



JS820302 PWRCORE 20™20V 7/8 IN. STROKE LENGTH ORBITAL JIGSAW KIT WITH **PWR**CORE 20™ LITHIUM BATTERY

VARIABLE TRIGGER WITH BRAKE

Maximum control for cleaner cuts on various projects

) 4-STAGE ORBITAL FUNCTION

High cutting efficiency for different materials, up to 2,800 strokes per minute

) TOOL-FREE BLADE CLAMP Easily replace and secure saw blades in seconds

) TOOL-FREE BEVEL ADJUSTMENT

Quickly adjust the shoe for a perfectly angled cut) LED LIGHT

Turns on with trigger, stays lit for 10 seconds after release

Specifications

Speed	0-2,800 SPM
Stroke	7/8 in
Blade Compatibility	U-Shank and T-Shank
Bevel Adjustment	Up to 45 Degrees
Length	8-3/8 in (213 mm)

Includes

Jig Saw 2.0Ah Battery Standard Charger

Wood Blade Metal Blade



RS582902 PWRCORE 20™20V RECIPROCATING SAW KIT WITH BATTERY AND CHARGER

Features

) TOOL-FREE BLADE CHANGE Easy blade changes

ADJUSTABLE PIVOTING SHOE Greater depth control

UP TO 3,000 STROKES PER MINUTE Fast, efficient cutting

VARIABLE SPEED TRIGGER Precision speed control

Specifications

Speed	0-3,000 SPM
Stroke Length	1 in (25 mm)
Trigger	Variable Speed
Blade Change	Tool-Free
Shoe	Pivoting
Length	15-3/8 in (390 mm)

Includes

Reciprocating Saw 2 0Ah Battery Standard Charge

Wood Cutting Blade Allen Wrench







® BRUSHLESS



) POWERFUL PERFORMANCE

The digital brushless motor provides efficient, highperformance power for cutting through strong materials like steel, ceramic, and more

SAFETY FIRST

Move through projects faster with tool-free guard adjustment

) ONBOARD WRENCH STORAGE

Conveniently located in side handle for easy access







Specifications

Speed	8,500 RPM
Wheel Diameter	4-1/2 in (115 mm)
Tool Size	12-1/4 x 2-7/8 x 4 in (311 x 73 x 102 mm)

Includes

Angle Grinder

5.0Ah Battery

auto**PWR**JUMP™ Charger

Grinding Disc Wrench

Wrench Storage Handle

Grinding Guard

PWRASSISTTM





SR660302 PWRCORE 20™ BRUSHLESS 20V 5 IN. RANDOM ORBITAL SANDER WITH BATTERY AND auto**PWR**JUMP™ CHARGER

) DIGITAL BRUSHLESS MOTOR

Provides high-performance power and extended tool life

) RANDOM ORBIT FUNCTION

Vibrates and spins simultaneously, reducing noticeable swirls and scratches

) DIAL SPEED CONTROL

For maximum control and speed precision

) HOOK & LOOP PAD

For easy sand paper changes





Specifications

Speed	7,000-11,000 OPM
Pad Diameter	5 in
Dust Box	With Micro-Filter
Dust Port	Fits 1-1/4 in (32 mm) Vacuum Attachment
Paper Attachment Type	Hook & Loop
Tool Size	6.3 x 5.9 x 8.4 in (160 x 151 x 213 mm)

Includes

Random Orbital Sander 2.0Ah **PWR**ASSIST™ Battery

autoPWRJump™ Charger

5 pcs Sanding Paper

Dust Box

AG290202 PWRCORE 20™20V 4-1/2 IN. ANGLE GRINDER KIT WITH **PWR**CORF 20™ LITHIUM BATTFRY

DUAL FUNCTION LOCK-ON SWITCH

Prevents accidental start up and locks on for prolonged use

) TOOL-FREE GUARD ADJUSTMENT

One-handed release to quickly adjust position of guard

) ENHANCED CONTROL

For an easier and safer soft start

) 3 POSITIONS FOR SIDE HANDLE

Choose the position that works best for the project

) ONBOARD WRENCH STORAGE

Conveniently located in side handle for easy access

Specifications

Speed	8,500 RPM
Wheel Diameter	4-1/2 in (115 mm)
Adjustable Guard	Tool-Free
Wrench	Integrated in Side Handle
Side Handle Positions	3
Length	11-1/8 in (285 mm)

Includes

Angle Grinder Wrench Storage 2.0Ah Battery Handle Standard Charger Grinding Guard Grinding Disc



SR6604B-10 PWRCORE 20[™] 5 IN. RANDOM ORBITAL SANDER WITH BATTERY AND CHARGER

Features

POWERFUL MOTOR

For a variety of sanding applications with 7,000-11,000 OPM

VARIABLE SPEED CONTROL

Provides maximum control for a variety of projects and surfaces

) REDUCES DUST

Microfiltration canister keeps dust contained

) EASY SANDPAPER CHANGING

A hook and loop system allows for simple and quick sanding paper changes

DUST SEALED POWER SWITCH

For extended tool life

Specifications

Pad Size	5 in Diameter
Speed	7,000-11,000 OPM
Orbit Diameter	1/8 in (3 mm)
Paper Attachment	Hook & Loop
Variable Speed	6 Speed Settings
Tool Size	5.7 x 5.9 x 6.3 in (145 x 150 x 160 mm)
Tool Weight	2.6 lbs (1.2 kg)

Includes

Random Orbital Sander 2.0Ah Battery Standard Charger

3 pcs Sanding Paper

Dust Canister



SR6607B-10 PWRCORE 20™BRUSHLESS 20V COMPACT MULTI-SANDER KIT WITH BATTERY AND auto**PWR**JUMP™CHARGER

) DIGITAL BRUSHLESS MOTOR

Counterweight balance reduces vibration for improved comfort

) 4-IN-1 SANDER WITH 3 ATTACHMENTS

Versatility to finish large surfaces and corners or edges

VIBRATION CONTROL

Counterweight balance and soft rubber grip reduces vibration for improved comfort





Specifications

Voltage	20V
No-load Speed	10,500 OPM
Pad Size	6 x 4-1/8 in (152 x 105 mm)
Tool size	5.8 x 3.9 x 4.5 in
Tool Weight	1.5 lbs
Orbit Diameter	1/16 in (1.6 mm)

Includes

Multi-Sander

2.0Ah PWRASSIST™ Battery auto**PWR**Jump™ Charger

(12) Sanding Sheets

Dust Bag (3) Attachments

Battery Jacket

Features COMPACT DESIGN

Lightweight design with simple on/off control makes it easy to use one-handed and clean hard-to-reach work spaces

VA593602 PWRCORE 20™ 20V VACUUM KIT

EASY-TO-CLEAN DUST CONTAINER

Fabric filter bag effectively traps dust and can be emptied with ease

) LONGER RUNTIME & BATTERY LIFE

Industry-leading **PWR**CORE 20™ lithium battery technology wraps each cell with cooling material to keep the battery powering on for 25% longer runtime and 2X battery life

Specifications

Voltage	20V
ronago	-*-

Includes

Vacuum

2.0Ah **PWR**ASSIST™ Battery

auto**PWR**Jump™ Charger

Crevice Tool

Extension Tube

Floor Tool







PL5938-1A PWRCORE 20™ BRUSHLESS 20V 3-1/4 IN. PLANER KIT WITH 4.0AH BATTERY AND auto**PWR**JUMP™CHARGER

Features

- CALIBRATED DEPTH ADJUSTMENT
- Knob selects how much material to remove
- **DUAL DUST PORTS**

Dual ports provide better visibility and keep the workspace clean

) BUILT-IN WRENCH STORAGE

For easy and secure access



Specifications

Speed	14,000 RPM
Planing Width	3-1/4 in (82 mm)
Single Pass Depth Capacity	5/64 in (2 mm)
Depth Adjustment	1/128 in (0.2 mm)
Max Rabbet Depth	5/16 in (8 mm)
Tool Size	11.56 x 6.57 x 7.38 in (294 x 167 x 187 mm)

Includes

Planer	Dust Bag
4.0Ah Battery	Spanner
Auto PWR JUMP™	Rabbet Fence
Charger	PWRASSIST™ USB
Parallel Guide	Adapter





FN0400D-00 12V/20V BRUSHLESS 4 IN. CLAMP FAN. TOOL ONLY

Features

-) POWERFUL AIRFLOW Up to 200 CFM
-) MULTIDIRECTIONAL PIVOTING AND SWIVELING HEAD

Sends air where you need it

) INDUSTRIAL THREADED CLAMP Strong holding capacity

) COMPACT SIZE

Built for tight spaces or easy on-the-go use

Specifications

Voltage	12V/20V/USB-C power
Fan Blade Size	4 in
Pivoting Angle	270°
Max. Air Volume	200 CFM
Max. Air Speed	11 MPH
Number of speeds	2
Speed settings	Low/High
Runtime	Up to 14 hr (20V 2.0Ah battery on low) Up to 8.5 hr (12V 2.0Ah battery on low)
Noise Level	54 dB

Includes

12/20V Brushless 4 in. Clamp Fan



JB4712B-00 PWRCORE 20™BRUSHLESS 20V JOBSITE BLOWER, TOOL ONLY

Features

) VARIABLE TRIGGER AND SPEED LOCK

Provides greater control based on the application and reduces user fatigue

) 3-SPEED SETTINGS

Delivers maximum output of 110 CFM at 180 MPH

) COMPACT POWER

Provides power in a lightweight design

) RUBBER NOZZLE

Protects work surfaces and increases durability







Specifications

Air Volume	110 CFM
Air Speed	180 MPH
Speed Setting	High, Medium, Low
Tool Size	14.6 x 2.9 x 9.6 in (370 x 73 x 243 mm)

Includes

Jobsite Blower Rubber Extension Nozzle

Inflator/Deflator Adapter





FN0700D-00 12V/20V BRUSHLESS 7 IN. FAN, TOOL ONLY

Features

-) POWERFUL AIRFLOW Up to 500 CFM
-) 180-DEGREE PIVOTING HEAD Sends air where you need it
- **VARIABLE SPEED**

Adjust the power level to your needs

BUILT-IN RAFTER HOOK For versatile mounting

Specifications

Voltage	12V/20V/USB-C Power
Fan Blade Size	7 in
Pivoting Angle	180°
Max. Air Volume	500 CFM
Max. Air Speed	14.3 MPH
Speed settings	Variable
Runtime	Up to 3 hr (20V 2.0Ah battery on high); Up to 1.5 hr (12V 2.0Ah battery on high)
Noise Level	50 dB

Includes

12V/20V Brushless



AU0225D-12 12V/20V POWER SNAKE DRAIN CLEANER 20V KIT

) UNCLOGS UP TO 2-INCH DRAINS

Clears drains from 3/4 inch to 2 inches in diameter

AUTO FEED

Engage clutch to extend or retract cable

VARIABLE SPEED TRIGGER

For precise control

) STURDY FOOT BASE

For better ergonomics during use

) CLEANING PORT

Drains excess water after use

) 1/4-INCH X 25-FOOT CARBON STEEL CABLE For extended reach and maximum durability

Specifications

Voltage	12V/20V
No Load Max Drum Spin Speed	0-500 RPM
Clearable Pipe Size	3/4 in – 2 in
Shipment Cable Diameter x Length	1/4 in x 25 ft
Replaceable cable	Yes
Tool Weight	6.4 lb / 2.9 kg
Tool Dimensions	15.3 in x 6.3 in x 8.22 in / 389mm x 160mm x

Includes

12V/20V Power Snake Drain Cleaner PWRCORE 20™ Charger

PWRCORE 20Th Lithium 2.0Ah







LH2500D-00 12V/20V COMPACT TOWER LIGHT, TOOL ONLY

Features

) FAST, TOOL-FREE SETUP

Flip out the legs and extend the pole without tools

) COMPACT AND LIGHTWEIGHT

Collapses for easy storage and transport

) FOOT CONTROL SWITCH

For hands-free brightness settings

) 270-DEGREE PIVOT + 270-DEGREE SWIVEL

For more control to direct light where you need it

) THREE BRIGHTNESS SETTINGS

Choose between 200, 1,000, and 2,500 lumens

Specifications

Voltage	12V/20V
Light Source	LED
Runtime	Up to 9 hours on 1000 lms with 20V 4.0Ah battery; Up to 6 hours on 1000 lms with 12V 4.0Ah battery
Modes	2,500/1,000/200 lm
Rotation	270° Pivot + 270° Swivel
Extended Height	5.2 ft
Collapsed Length	21.65 in

Includes

Compact Tower Light



RO5028-00 PWRCORE 20™ BLUETOOTH 20V SPEAKER, TOOL ONLY

Features

BLUETOOTH SPEAKER

Portable and wireless to take with you wherever you go

) BASS BOOSTER

Dual passive bass radiators for quality sound

) PHONE CRADLE

A helpful spot for your phone while you listen

CHARGE OTHER DEVICES

Stay powered up with the integrated USB port

) AUXILIARY INPUT

Optional connection for your phone or MP3 player

Specifications

Voltage	20V
Bluetooth Connectivity	Up to 100 feet (30 m)
Speaker	2.5 in, 10W
USB Port	2.1A 5V
Auxiliary Input	3.5 mm
Unit Size	4-3/4 x 7 x 5 in (120 x 178 x 127 mm)

Includes

20V Speaker

3.5 mm Auxiliary Cord

SKIL

LH552301 PWRCORE 20™20V SPOT LIGHT, TOOL ONLY

Features

reatures

) 104-DEGREE PIVOTING HEAD Shine the light in different directions

- ----

) 2-STEP ILLUMINATION CONTROL 150 or 300 lumens based on the job

) HANDS-FREE USE

Hanging hook on back

Specifications

Two Settings	300 / 150 Lumens
Runtime	19 hours with a SKIL 2.0Ah battery (Low Setting)
Pivoting Angles	0-104°
Tool Size	5.3 x 2.8 x 8.2 in (135 x 72 x 209 mm)

Includes

Spot Light



IF5940-00 PWRCORE 20™ 20V DUAL FUNCTION INFLATOR, TOOL ONLY

Features

HIGH VOLUME MODE

With included high volume hose, large inflatables like air mattresses inflate and deflate easily

HIGH PRESSURE MODE

Preset the pressure for an accurate and efficient way to automatically fill a variety of tires hands-free

) DIGITAL PRESSURE GAUGE

Digital readout and control buttons allow you to choose two modes

) LED WORK LIGHT

See your work clearly with a bright LED

Specifications

Pressure	Up to 160 PSI
Air Volume	14.4 CFM (Low Pressure)
Hose Length	26 in
Vehicle Power	12V
Tool Size	12 x 8-3/8 x 5-1/4 in

Includes

Dual Function Inflator

Sports Ball Needle Pinch Valve Adapter High Volume Hose

LH5534-00 PWRCORE 20™20V FLOOD LIGHT, TOOL ONLY

Features

) DUAL-PANEL FLOOD LIGHT

Ultra-bright LED panels in this work light illuminate large work areas with up to 1,800 lumens for greater visibility

) ROTATING LED PANELS

Each panel rotates independently to illuminate multiple surfaces at once

) ILLUMINATION CONTROL

Choose from three light settings depending on the task at hand: high, low, or single panel

) LOW BATTERY WARNING

Light dims twice when the battery is low, so you'll never get caught in the dark

) AUTOMATIC SHUT OFF

Lights power off automatically when panels are closed

Specifications

Three Settings	1,800, 900, or Single Panel 450 Lumens
Runtime	Up to 3.5 hours on high setting with SKIL 20V 4.0Ah battery
Pivoting Angles	Lower Panel 0-170°, Upper Panel 0-270°
Low Battery	Pulse indication
Mounting Thread	1/4 in -20 UNC
Tool Size	8.54 x 8.23 x 6.9 in (217 x 209 x 175 mm)
Weight	3.17 lbs (1.44 kg)

Includes

Flood Light



QC5359B-02 PWRCORE 20™20V DUAL PORT auto**PWR**JUMP™ CHARGER WITH SIMULTANEOUS CHARGING

Feature

) AUTO PWRJUMP™ CHARGING

Charges to 25% in just 5 minutes* or 100% in 30 minutes

) PWRCORE 20™ SYSTEM

Pairs with any SKIL 20V Lithium battery

) SIMULTANEOUS CHARGING
Charges any two PWRCORE 20TM

Charges any two **PWR**CORE 20[™] batteries simultaneously

*Based on 2.0 Ah battery


Specifications

Charging Current	6A for each port
Charging Time	30 mins for 2* 2.0Ah batteries 60 mins for 2* 5.0Ah batteries
Input Voltage & Frequency	120V~60Hz
Output Voltage	20V

Includes

150W Dual Port auto**PWR**JUMP™ Charger



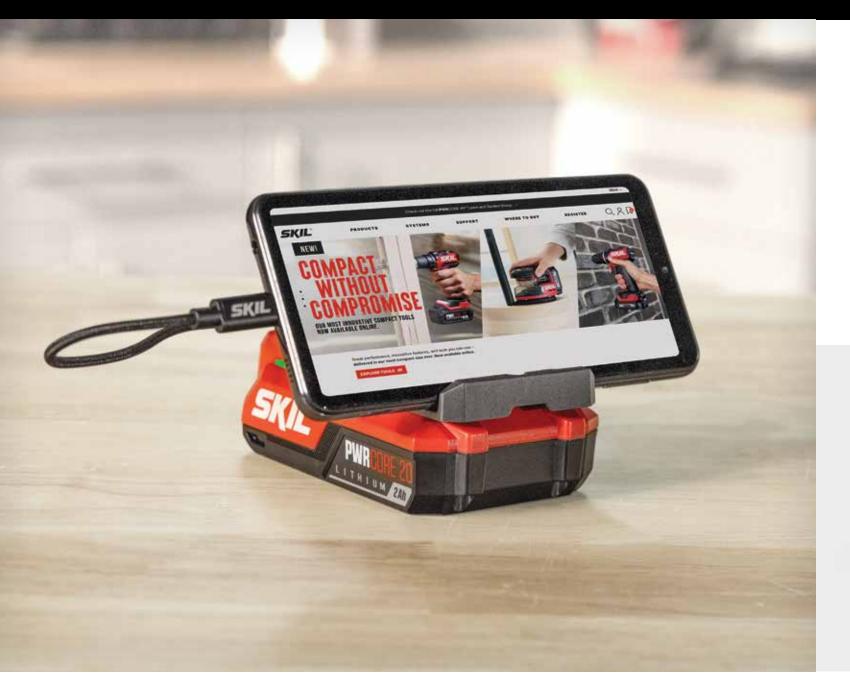



QC536001 PWRCORE 20[™] auto**PWR**JUMP[™] CHARGER

Features

) autoPWRJUMP™ CHARGING

Charges to 25% in just 5 minutes*, or 100% battery in 30 minutes

PWRCORE 20™ SYSTEM

Pairs with SKIL 20V Lithium batteries

) LED CHARGING INDICATOR Indicates charging status

*Based on 2.0 Ah battery

Specifications

Power Cord Length	6 feet
Size	6 x 6.9 x 2.4 in
Charging Current	6A
Compatibility	All SKIL 20V batteries

Includes

auto**PWR**JUMP™ Charger



SC535801 PWRCORE 20™20V STANDARD CHARGER

Features

) LED CHARGING STATUS

Indicates when charging is complete

PWRCORE 20™ SYSTEM

Pairs with SKIL 20V Lithium batteries

Specifications

Charge Time	Charges 2.0Ah battery in 1 hour
	Charges 4.0Ah battery
	Charges 5.0Ah battery in 130 minutes
Charge Status	LED indicator light
Mounting	Back keyholes for wall mounting
Input Power:	60W

Includes

auto**PWR**JUMP™ Charger

BY5100B-00 20V USB-C 2.0AH **PWR**CORE 20™ LITHIUM BATTERY



) 100W USB-C PD 3.0 PORT

Up to 20X higher power than USB-A to power a wide range of devices

TWO-WAY RAPID CHARGING

Charge the battery or personal devices with the battery's 100W USB-C port

) 20 PERCENT MORE COMPACT

Smaller, more compact battery for reduced fatigue compared to SKIL batteries with USB-A port

PULSING USB-C PORT LED

Indicates charging and discharging status

Specifications

Battery Type	Rechargeable Lithium-lon
Voltage	20V
Capacity	2.0Ah
USB Port	USB-C, 5/9/12/15V, 3.0A, 20V, 5.0A
Compatibility	All SKIL 20V tools
Fuel Gauge	Green LED
Charging	With USB-C Port or SKIL 20V charger

Includes

2.0Ah Lithium Battery with USB-C Port Battery Jacket



BY5200B-00 20V USB-C 4.0AH **PWR**CORE 20[™] LITHIUM BATTERY

Features

) 100W USB-C PD 3.0 PORT

Up to 20X higher power than USB-A to power a wide range of devices

) TWO-WAY RAPID CHARGING

Charge the battery or personal devices with the battery's 100W USB-C port

PULSING USB-C PORT LED

Indicates charging and discharging status

Specifications

Battery Type	Rechargeable Lithium-lon
Voltage	20V
Capacity	4.0Ah
Compatibility	All SKIL 20V Tools
Fuel Gauge	Green LED
Charging	With USB-C Port or SKIL 20V charger

Includes

4.0Ah Lithium Battery with USB-C Port Battery Jacket 0.5m USB-C to USB-C Cable

38 www.skil.com 0.5m USB-C to USB-C cable



BY519702 PWRCORE 20™ LITHIUM 2.0AH 20V BATTERY WITH **PWR**ASSIST™ MOBILE CHARGING



Features

- PWRCORE 20™ LITHIUM TECHNOLOGY Industry-leading battery technology, 25% longer runtime and 2X longer battery life
- PWRASSIST™ MOBILE CHARGING Utilize USB-A port on the battery to charge other devices
-) FUEL GAUGE
- LED charge status indicators show how much power is left

Specifications

Battery Type	Rechargeable Lithium-Ion
Voltage	20V
Capacity	2.0Ah
USB Port	USB-A, 5V, 1.0A
Compatibility	All SKIL 20V tools
Fuel Gauge	Green LED
Charging	Only with SKIL 20V charger

Includes

2.0Ah Battery Battery Jacket

BY519601 20V 4.0AH **PWR**CORE 20™ LITHIUM BATTERY

Features

PWRCORE 20™ **LITHIUM TECHNOLOGY**

Industry-leading technology keeps the battery cool and powering on for 25% longer runtime

2X BATTERY LIFE

Patented battery technology extends the battery life 2X longer

Specifications

Battery Type	Rechargeable Lithium-lon
Voltage	20V
Capacity	4.0Ah
Compatibility	All SKIL 20V tools
Fuel Gauge	Green LED
Charging	Only with SKIL 20V charger

Includes

4.0Ah Battery



BY519603 20V 5.0AH **PWR**CORE 20™ LITHIUM BATTERY

Features

PWRCORE 20™ LITHIUM TECHNOLOGY Industry-leading technology keeps the battery cool and powering on for 25% longer runtime

2X BATTERY LIFE

Patented battery technology extends the battery life

Specifications

Battery Type	Rechargeable Lithium-lon
Voltage	20V
Capacity	5.0Ah
Compatibility	All SKIL 20V tools
Fuel Gauge	Green LED
Charging	Only with SKIL 20V charger

Includes

5.0Ah Battery





AVAILABLE COMBO KITS	DESCRIPTION	INCLUDED ITEMS
	CB743701 PWR CORE 20 [™] BRUSHLESS 20V DRILL DRIVER & IMPACT DRIVER KIT WITH auto PWR JUMP™ CHARGER	Drill Driver PH2 Bit Impact Driver (2) Belt Clips 2.0Ah PWR ASSIST™ Battery Jacket Battery auto PWR JUMP™ Charger 2-inch Double-End PH2 Bit
	CB7475-1A PWR CORE 20™ BRUSHLESS 20V DRILL DRIVER & CIRCULAR SAW KIT WITH WITH 4.0AH BATTERY	Drill Driver PH2 Bit Circular Saw Carbide Blade 4.0Ah Battery Allen Key autoPWRJUMP™ Vacuum Adaptor Charger PWRASSIST™ USB Adapter Belt Clip
	CB7488B-20 PWR CORE 20 [™] BRUSHLESS 20V 4-TOOL COMBO KIT WITH auto PWR JUMP [™] CHARGER	Drill Driver Reciprocating Saw Circular Saw Area Light 2.0Ah Battery with USB 4.0Ah Battery Auto PWRJUMPTM Charger Belt Clip 2-inch Double-End PH2 Bit Wood Cutting Blade Wood Cutting Blade Wood Cutting Blade Wood Cutting Blade Wood Farting Blade Wood Farting Blade Wood Cutting Blade Soft Bag Belt Clip
	CB7440-21 PWR CORE 20 [™] BRUSHLESS 20V 4-TOOL COMBO KIT WITH auto PWR JUMP [™] CHARGER	Drill Driver Belt Clip Circular Saw 24T Thin Carbide Wood Multi-Tool Cutting Blade Speaker Allen Key 2.0Ah Battery Dust Port 4.0Ah Battery 10 pcs Sanding Paper autoPWRJUMP™ Bi-Metal Blade Charger Sanding Pad 2-inch Double-End Battery Jacket PH2 Bit 3.5 mm AUX Cord
TIT T	CB7489B-20 PWR CORE 20 [™] BRUSHLESS 20V 6-TOOL COMBO KIT WITH auto PWR JUMP [™] CHARGER	Drill Driver Impact Wrench Single Function Inflator Jobsite Blower Vacuum Area Light (2) 2.0Ah Batteries with USB Auto PWRJUMP™ Charger 2-inch Double-End PH2 Bit (2) Batteries (2) Batter Clips Presta Valve Adaptor Sports Ball Needle Pinch Valve Adaptor Rubber Extension Nozzle Inflator/Delfator Adapter Crevice Nozzle Extension Tube Wide Nozzle (2) Battery Jackets Power Tool Storage Bag
	CB7487B-11 PWRCORE 20™ BRUSHLESS 20V HAMMER DRILL AND IMPACT DRIVER WITH 4.0AH BATTERY AND autoPWRJUMP™CHARGER	Hammer Drill PH2 Bit Impact Driver (2) Belt Clips 4.0Ah Battery Power Tool Storage Auto PWRJUMP™ Bag Charger PWRASSIST™ USB Adapter 2-inch Double-End PH2 Bit
	CB739301 PWR CORE 20 [™] BRUSHLESS 20V 3-TOOL COMBO KIT WITH PWR ASSIST [™] USB ADAPTER	Drill Driver PH2 Bit Circular Saw Belt Clip PWRAssist™ Wood Cutting Blade USB Adapter Allen Key 2.0Ah Battery Dust Extractor Charger

AVAILABLE COMBO KITS	DESCRIPTION	INCLUDED ITEMS
HE STATE OF THE ST	CB739701 PWR CORE 20™ BRUSHLESS 20V 4-TOOL COMBO KIT	Drill Driver PH2 Bit Reciprocating Saw Belt Clip Circular Saw (2) Wood Cutting Spot Light Blades (2) 2.0Ah Batteries (2) Allen Keys Charger Dust Extractor
	CB7443-21 PWR CORE 20 [™] BRUSHLESS 20V 6-TOOL COMBO KIT WITH 4.0AH BATTERY AND auto PWR JUMP™ CHARGER	Drill Driver Reciprocating Saw Bit PH2 Multi-Tool Speaker Sander Sander Spotlight 2.0Ah Battery With USB 4.0Ah Battery Auto PWRJump™ Charger Dust Box Spotlight 13 pcs Sanding Paper Sanding Pad Bi-Metal Blade Battery Jacket Wire for AUX Port Allen Key
	CB739001 PWR CORE 20™20V DRILL DRIVER & IMPACT DRIVER KIT	Drill Driver Standard Charger Impact Driver (2) PH2 Bits 2.0Ah Battery (2) Belt Clips
	CB739601 PWRCORE 20™ 20V 4-TOOL COMBO KIT	Drill Driver Standard Charger Impact Driver (2) PH2 Bits Reciprocating Saw (2) Belt Clips Spot Light Wood Cutting Blade (2) 2.0Ah Batteries Allen Key
	CB8437B-10 PWR CORE 20 [™] BRUSHLESS 20V COMPACT DRILL DRIVER & IMPACT DRIVER KIT WITH auto PWR JUMP [™] CHARGER	Drill Driver (2) PH2 Bits Impact Driver (2) Belt Clips 2.0Ah Battery with USB Battery Jacket Auto PWR Jump TM Charger
	CB5196B-11 PWR CORE 20™ 20V BATTERY AND CHARGER STARTER KIT	4.0Ah Battery Standard Charger
	CB5197B-21 PWR CORE 20 [™] 2X2.0AH BATTERY AND CHARGER STARTER KIT	(2) 2.0Ah Batteries Standard Charger
THE THE PARTY OF T	CB5100B-11 PWR CORE 20™ 2.0AH 20V USB-C BATTERY AND CHARGER STARTER KIT	2.0Ah USB-C Battery 45W USB-C PD Charger Battery Jacket 0.5m USB-C to USB-C Cable

BORE 20tm

This lineup offers a range of outdoor power, plus the benefits of our patented **PWR**CORE 20™ lithium battery.





ADVANCED BATTERY TECHNOLOGY



Industry-leading battery technology wraps each cell with cooling material to keep the battery powering on for 25% longer runtime.

2X BATTERY LIFE



SKIL's patented technology extends the life 2X longer.



Pairs with any **PWR**CORE 20™ Battery.

2,800 SPM

Single side

dual-action

Hardened steel

22 in

3/4 in

5.8 lbs



PM4912B-20 PWRCORE 20[™] BRUSHLESS 18 IN. LAWN MOWER WITH TWO 4.0 AH BATTERIES AND **DUAL PORT CHARGER**







Features

) POWERFUL PERFORMANCE

The digital brushless motor provides efficient, high-performance power without the hassle of gas

) PUSH-BUTTON START

Get started easily and quickly with a convenient

) SINGLE LEVER HEIGHT ADJUSTMENT

Six settings quickly adjust to your preferred grass height

) TELESCOPING/FOLDABLE HANDLE

BRUSHLESS

Telescoping handle folds easily for convenient vertical storage

Specifications

Voltage	2 X 20V
Motor	Brushless
Runtime	Up to 45 min
Charge Time	100 min
Deck Size	18 in
Cutting Height	6 cutting height settings, 1 in~3 in
Grass Bag	1.4 bushel (50L) collector capacity
Function	2-in-1 mulching or

bagging

BL4714B-10 PWRCORE 20™ BRUSHLESS 400 CFM LEAF

Includes

2 X 20V Brushless Lawn Mower (2) 4.0Ah Batteries **Dual Port Charge** Mulching Plug Grass Bag



BLOWER WITH 4.0AH BATTERY AND CHARGER

VARIABLE SPEED WITH CRUISE CONTROL

Provides control for everything from clearing flower beds or your backyard, plus cruise control to stay powered on

) TURBINE FAN

Maximizes leaf blower performance for up to 400 CFM of clearing power

) EASY STORAGE BRACKET

This blower comes equipped with an Easy Storage Hook and Bracket to conveniently store all your SKIL PWRCORE 20™ outdoor equipment





Specifications

Voltage	20V
Motor	Brushless
Air Volume	400 CFM
Max Air Speed	100 MPH
Speed Control	Variable with Cruise Control
Net Weight	4.4 lbs

Includes

20V Brushless Leaf Blower

4.0Ah Battery

Charger

Nozzle Attachment

EASYSTORAGE Bracket



HT4222B-10 PWRCORE 20[™]22 IN. HEDGE TRIMMER WITH BATTERY AND CHARGER

LT4823B-10 PWRCORE 20™ BRUSHLESS 20V 13 IN. STRING

) DUAL ACTION HARDENED STEEL BLADES + BLADE TIP PROTECTOR

For clean and precise cuts, even along paths and fences

) 2.800 SPM

For getting tough jobs done fast

) 3/4-INCH CUT CAPACITY

Cut through large branches and bushes with ease

) EASY STORAGE BRACKET

This hedge trimmer comes equipped with an EASYSTORAGE Hook and Bracket to conveniently store all your SKIL PWRCORE 20™ outdoor equipment

SAWING FUNCTION

For cutting larger diameter branches



Net Weight Includes

Blade

Voltage

Speed

Blade Length

Blade Type

Cutting Capacity

20V 22-inch Hedge Trimmer


Specifications

2.0Ah Battery

Charger

Blade Sheath

EASYSTORAGE Bracket

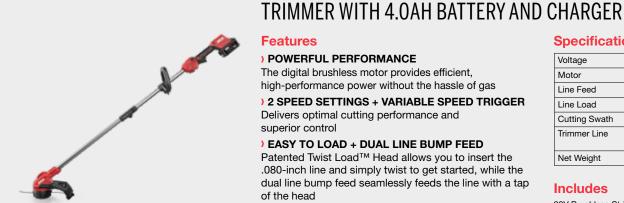

® BRUSHLESS

POWERFUL PERFORMANCE

The digital brushless motor provides efficient, high-performance power without the hassle of gas

) 2 SPEED SETTINGS + VARIABLE SPEED TRIGGER Delivers optimal cutting performance and

superior control

) EASY TO LOAD + DUAL LINE BUMP FEED

Patented Twist Load™ Head allows you to insert the .080-inch line and simply twist to get started, while the dual line bump feed seamlessly feeds the line with a tap



2X BATTERY LIFE

Specifications

Voltage	20V
Motor	Brushless
Line Feed	Bump
Line Load	Twist Load™
Cutting Swath	13 in
Trimmer Line	Dual .080-inch twist line
Net Weight	6.2 lbs

Includes

20V Brushless String Trimmer

4.0Ah Battery

Charger

Extra Line

EASYSTORAGE Bracket & Hook







PRO600B-11 PWRCORE 20™ BRUSHLESS 20V 6 IN. PRUNING SAW KIT



) AUTO-LUBRICATING CHAIN For longer chain life

TOOL-FREE CHAIN TENSIONING
Adjust the chain with the twist of a dial

COMPACT AND LIGHTWEIGHT

For precision cutting with one hand





Specifications

Voltage	20V
Chain Speed	8m/s
Bar Length	6 in
Chain Pitch	1/4 in
Chain Gauge	0.043 in
Oil Tank	1.2 fl oz
IP Class	IPX4
Cuts Per Charge	114 cuts (2Ah)

Includes

20V 6 in Pruning Saw 2.0Ah Battery Standard Charger

PS4563B-10 PWRCORE 20™8 IN. POLE SAW WITH BATTERY AND CHARGER

Features

10-FOOT EXTENDABLE SHAFT

The SKIL pole saw comes equipped with an aluminum 3.5-foot extendable shaft, taking the 6.5-foot stock pole saw to 10 feet in a snap

) 135-DEGREE PIVOTING HEAD

This saw comes equipped with a 135-degree pivoting head with 8 position settings along the way, allowing the 8-inch bar and chain head to rotate for maximum cutting control

AUTO-LUBRICATING & TOOL-FREE CHAIN TENSIONING

The auto-lubricating feature provides efficiency and performance, while paired with tool-free chain tensioning for hassle-free adjustments



2X BATTERY

Specifications

Bar & Chain	8 in
Tool Length	10 feet
No-load Chain Speed	8 m/s
Pitch	3/8 in
Gauge	0.043 in

Includes

20V Pole Saw

2.0Ah Battery

Standard Charger Scabbard

Shauldar Ctran

Shoulder Strap

Ulink

(2) EASYSTORAGE Brackets

PRO601B-11 PWRCORE 20™ BRUSHLESS 20V 6 IN. TELESCOPIC PRUNING SAW KIT

Features

) TELESCOPING HANDLE

Pole extends up to 2.8 feet in total length for up to 7 feet of cutting reach

) COMPACT AND LIGHTWEIGHT

For precision cutting with one hand

) TOOL-FREE CHAIN TENSIONING

Adjust the chain with the twist of a dial

) EXTENDED RUNTIME

Up to 115 cuts per charge (with 2.0 Ah battery)





Specifications Voltage

Voltage	20V
Chain Speed	5m/s
Bar Length	6 in
Chain Pitch	1/4 in
Chain Gauge	0.043 in
IP Class	IPX4
Cuts Per Charge	115 cuts (2Ah)

Includes

20V 6 in Telescopic Pruning Saw 2.0Ah Battery

2.0Ah Battery Standard Charger



CS4562B-10 PWRCORE 20™ BRUSHLESS 12 IN. CHAIN SAW WITH 4.0AH BATTERY AND CHARGER

Features

) POWERFUL PERFORMANCE


The digital brushless motor provides efficient, high-performance power without the hassle of gas

) TOOL-FREE CHAIN TENSIONING & AUTO LUBRICATION

Adjust the chain tension on this electric chainsaw with a convenient dial on the side of the tool while reducing friction with auto lubrication

) ANTI-KICKBACK BRAKE

Cuts the power when kickback occurs, so you can work with confidence



2X BATTERY

Specifications

Voltage	20V
Motor	Brushless
Bar Length	12 in
Chain Pitch	3/8 in
Chain Gauge	0.043 in
Oil Tank	6.8 fl oz (200 ml)
No-Load Chain Speed	7.9 m/s
Net Weight	5.5 lbs

Includes

Brushless 20V 12 in Chainsaw

EASYSTORAGE Bracket

4.0Ah Battery

Charger

Chain Scabbard

Feat

GH1000B-11 PWRCORE 20™20V SHEAR & SHRUB 2-IN-1 KIT

Features

2-IN-1 CUTTING

For grass trimming and hedge shearing

) TOOL-FREE BLADE CHANGES

Easily swappable blades for specific tasks

) COMPACT DESIGN

For easy one-handed operation and working in tight spaces





2X BATTERY LIFE

Specifications

Voltage	20V
No-Load Speed	2100 SPM
Tooth Spacing	5/16 in (8mm)
Shrub Blade Length	8 in (20 cm)
Grass Blade Length	5 in (12 cm)
Trigger Switch + Lock Off Button	Yes
Net Weight	2 lbs

Includes

20V Shear & Shrub 2-in-1 2.0Ah Battery

Standard Charger EASY**STORAGE** Bracket

AVAILABLE COMBO KITS DESCRIPTION INCLUDED ITEMS 20V Brushless EASY**STORAGE CB7542B-10 PWR**CORE 20[™] String Trimmer Bracket &Hook **BRUSHLESS 13 IN. STRING** 20V Brushless Extra Line Leaf Blower Nozzle Attachment TRIMMER AND 400 CFM LEAF 4.0Ah Battery **BLOWER KIT WITH 4.0AH** Charger **BATTERY AND CHARGER**

BORE 40TM


The **PWR**CORE 40[™] platform offers a complete lineup of outdoor power tools–the power of cordless with complete brushless assortment. Patented lithium battery technology allows you to ditch the gas without sacrificing any power.





ADVANCED BATTERY TECHNOLOGY

PWRCORE 40°



Industry-leading battery technology. 25% longer runtime. 2X battery life.

15-MINUTE CHARGING autoPWRJUMP*



Charges 0-30% in just 15 minutes*. Fully charges within 60 minutes*. (*Based on 2.5Ah battery)



SB2001C-10 PWRCORE 40[™] BRUSHLESS 40V 20 IN. SINGLE STAGE SNOW BLOWER KIT







Features

-) THROWS SNOW UP TO 30 FEET
-) RUBBER-TIPPED STEEL FRAME AUGER
-) DIGITAL BRUSHLESS MOTOR
-) REAR CRANK CHUTE CONTROL
-) LED HEADLIGHT
-) QUICK-FOLD STEEL HANDLE

® BRUSHLESS

Specifications

=	
Voltage	40V
Motor	Brushless
Clearing Width	20 in
Throwing Distance	30 ft
Intake Height	10.5 in
Auger Drive	Belt
Chute Rotation Turning Radius	180°±5°
Deflector Direction Adjusting Degree	0-48°

Includes

40V 20 In. Single Stage Snow Blower 6.0Ah Battery Auto **PWR**JUMP™ Charger

Features

- LOAD-SENSING TECHNOLOGY FOR OPTIMIZED **CUTTING PERFORMANCE**
- COMPACT TELESCOPING HANDLE FOR **VERTICAL STORAGE**
-) DIGITAL BRUSHLESS MOTOR

25% LONGER RUNTIME

-) PUSH BUTTON START
-) SELF-PROPEL WITH VARIABLE SPEED **CONTROL DIAL**
- 2-IN-1 MULCHING OR BAGGING
-) SINGLE-LEVER DECK HEIGHT ADJUSTMENT

Coocifications

Specifications	
Voltage	40V
Motor	Brushless
Runtime	Up to 40 min
Charge Time	120 min
Deck Size	20 in
Cutting Height	7 cutting height settings, 1.5 in~4 in
Grass Bag	1.7 bushel (60L) collector capacity
Self-Propel	0.4m/s-1.4m/s variable speed
Dimension	3.05 x 1.74 x 1.28 feet (930 x 530 x 390 mm)

Includes

40V Brushless Self-Propelled Auto **PWR**JUMP™ Charger 5.0Ah Battery Mulching Plug Grass Bag



PSS1200C-10 PWRCORE 40™ BRUSHLESS 40V 12 IN. POWER HEAD SNOW SHOVEL KIT

-) THROWS SNOW UP TO 20 FEET
-) 12-INCH CLEARING WIDTH
-) TWO-SPEED SELECTOR
-) DIGITAL BRUSHLESS MOTOR
-) ATTACHMENT-READY

ATTACHMENT ONLY: PSS1200





Specifications

Voltage	40V
Motor	Brushless
Cleaning Width	12 in
Auger Diameter	6 in
Auger Rotation Direction	Forward
Max Throwing Distance	20 ft

Includes

40V 12 in. Snow Shovel Attachment Brushless 40V

Auto **PWR**JUMP™



PM4910-10 PWRCORE 40™ BRUSHLESS 40V 20 IN. MOWER KIT

Features

SM4910-10 PWRCORE 40[™] BRUSHLESS 40V

15-MINUTE CHARGING

20 IN. SELF-PROPELLED MOWER KIT

- LOAD-SENSING TECHNOLOGY FOR OPTIMIZED CUTTING PERFORMANCE
- COMPACT TELESCOPING HANDLE, TO STORE VERTICALLY
- DIGITAL BRUSHLESS MOTOR
- PUSH BUTTON START
-) 2-IN-1 MULCHING OR BAGGING





Specifications

Voltage	40V
Motor	Brushless
Runtime	Up to 45 min
Charge Time	120 min
Deck Size	20 in
Cutting Height	7 cutting height settings, 1.5 in~4 in
Grass Bag	1.7 bushel (60L) collector capacity
Dimension	3.05 x 1.74 x 1.28 feet (930 x 530 x 390 mm)

Includes

40V Push Mower Auto **PWR**JUMP™ Charger 5.0Ah Battery

Mulching Plug



BL4713C-11 PWRCORE 40™ BRUSHLESS 40V 530 CFM LEAF BLOWER KIT

Features

- VARIABLE SPEED WITH POWER BOOST
- 530 CFM / 140 MPH FOR CLEARING POWER
- DIGITAL BRUSHLESS MOTOR
-) TURBINE FAN FOR OPTIMAL PERFORMANCE
-) QUICK-RELEASE TUBE FOR COMPACT STORAGE







Specifications

Voltage	40V
Motor	Brushless
Air Volume	530 CFM
Max Air Speed	140 MPH
Speed Control	Variable with Power Boost
Net Weight	4.8 lbs

Includes

40V Brushless Leaf Blower 2.5Ah Battery Auto PWRJUMP™ Charger

® BRUSHLESS

POLE SAW KIT Features

-) TELESCOPIC SHAFT & ANGLED HEAD
-) AUTO-LUBRICATING CHAIN
-) TOOL-FREE CHAIN TENSIONING
-) ADJUSTABLE AUXILIARY HANDLE
-) DIGITAL BRUSHLESS MOTOR







PS4561C-10 PWRCORE 40™ BRUSHLESS 40V 10 IN.

Specifications

Full Length	10 feet
No-Load Chain Speed	12m/s
Length Adjust Range	7.5-10 feet (2.29 - 3.04 m)
Bar Length	10 in (Trilink)
Chain Pitch	3/8 in
Chain Gauge	0.043 in
Telescopic Shaft	Yes

Includes

40V Pole Saw 2.5Ah Battery

Auto PWRJUMP™ Charger

Scabbard

Specifications

BL4713-10 PWRCORE 40™ BRUSHLESS 40V 500 CFM LEAF BLOWER KIT

Features

- **VARIABLE SPEED WITH POWER BOOST**
- 500 CFM / 120 MPH FOR CLEARING POWER
- DIGITAL BRUSHLESS MOTOR
-) TURBINE FAN FOR OPTIMAL PERFORMANCE
-) QUICK-RELEASE TUBE FOR COMPACT STORAGE





Specifications

Voltage	40V
Motor	Brushless
Air Volume	500 CFM
Max Air Speed	120 MPH
Speed Control	Variable with Power Boost
Net Weight	4.8 lbs

Includes

40V Brushless Leaf Blower 2.5Ah Battery Auto PWRJUMP™ Charger

Specifications



CS4555-10 PWRCORE 40™ BRUSHLESS 40V 14 IN. CHAINSAW KIT

-) TOOL-FREE BLADE TENSIONING
- ANTI-KICKBACK BRAKE
- DIGITAL BRUSHLESS MOTOR
-) AUTO-LUBRICATING CHAIN

Voltage	40V
Motor	Brushless
Bar Length	14 in
Chain Pitch	3/8 in
Chain Gauge	0.043 in
Oil Tank	5.0 fl oz (150 ml)

7.83 lbs

Includes


Net Weight

40V Brushless Chainsaw

2.5Ah Battery Auto PWRJUMP™ Charger

Chain Scabbard







HT4221-10 PWRCORE 40™ BRUSHLESS 40V 24 IN. HEDGE TRIMMER KIT

Features

- 24-INCH CUTTING LENGTH
- 3/4-INCH CUT CAPACITY
- **DUAL-ACTION HARDENED STEEL BLADES**
-) DIGITAL BRUSHLESS MOTOR

voitage	400
Motor	Brushless
Speed	3,000 SPM
Blade Length	24 in
Cutting Capacity	3/4 in
Blade Type	Single side dual-actio
Blade	Hardened steel



BRUSHLESS

















-) DELIVERS 40CC GAS EQUIVALENT
-) FASTEST CHARGING IN ITS CLASS
-) 18-INCH BAR AND CHAIN
-) **AUTO-LUBRICATING CHAIN**
-) DIGITAL BRUSHLESS MOTOR







Specifications

Voltage	40V
Motor	Brushless
Chain Speed	17 m/s
Bar Length	18 in
Chain Gauge	.050 in
Chain Pitch	3/8 LP in
Drive Links	62
Oli Tank Volume	5 oz

Includes

40V 18 in Chain Saw	Chain
6.0Ah Battery	Bar
320W Charger	Scabbar

♣ - √ **← ←**

LT4832C-11 PWRCORE 40™ BRUSHLESS 40V 15 IN. STRING TRIMMER KIT WITH SMART LOAD™

Features

- > SMART LOAD™ For fast, easy line loading
-) 15-INCH CUTTING SWATH
-) DIGITAL BRUSHLESS MOTOR
-) 2 SPEED SELECT
-) ADJUSTABLE AUXILIARY HANDLE





15-MINUTE CHARGING

Specifications

Voltage	40V
Motor	Brushless
Line Feed	Bump
Line Load	Smart Load™
Cutting Swath	15 in
Line Diameter	0.080 in
Net Weight	7.2 lbs

40V

Brushless

Bump feed

Twist Load™

Includes

40V String Trimmer

2.5Ah Battery

Auto **PWR**JUMP™ Charger

Specifications

Voltage

Motor

Line Feed

Line Load



TH1200C-11 PWRCORE 40™ BRUSHLESS 40V 12 IN. TOP HANDLE SAW KIT

Features

-) TOOL-FREE CHAIN TENSIONING
-) ANTI-KICKBACK BRAKE
-) DIGITAL BRUSHLESS MOTOR
-) AUTO-LUBRICATING CHAIN



Voltage	40V
Motor	Brushless
Bar Length	12 in
Chain Pitch	1/4 in
Chain Gauge	0.043 in

Includes

40V Brushless Chainsaw 2.0Ah Battery 60W Charger Chain Bar Scabbard



® BRUSHLESS

PLT1500C-10 PWRCORE 40™ BRUSHLESS 40V 16 IN. POWER HEAD STRING TRIMMER KIT

eatures

- TWIST LOAD™
- Simply insert the line and twist to load
-) 16-INCH CUTTING SWATH
- DIGITAL BRUSHLESS MOTOR
- DUAL-LINE BUMP FEED
-) ATTACHMENT-READY Universal fit







Includes

SKIL 40V Power Head

14/16 in String Trimmer Attachment

4.0Ah Battery

Auto **PWR**JUMP™ Charger

BRUSHLESS





LT4818-10 PWRCORE 40™ BRUSHLESS 40V 14 IN. STRING TRIMMER KIT



Features

- > TWIST LOAD™
 Simply insert the line and twist to load
-) 14-INCH CUTTING SWATH
-) DIGITAL BRUSHLESS MOTOR
- **) VARIABLE SPEED TRIGGER**
-) ADJUSTABLE AUXILIARY HANDLE







Specifications

Voltage	40V
Motor	Brushless
Line Feed	Bump
Line Load	Twist Load™
Cutting Swath	14 in
Trimmer Line	Dual 0.080 in Twist Line
Net Weight	6.8 lbs

Includes

40V String Trimmer 2.5Ah Battery

Auto **PWR**JUMP™ Charger



PI0300C-00 PWRCORE 40[™] 40V 300W INVERTER

Feature

-) 300W CONTINUOUS POWER
-) PURE SINE WAVE
-) SIMULTANEOUSLY POWERS UP TO FOUR DEVICES
- **) LED WITH TWO BRIGHTNESS MODES**

Specifications

Voltage	40V
AC Ports	1
AC Output Power	300W Continuous, 500W Peak
USB Ports	3
USB Output	(1) USB-A 5V 2.1A; (1) USB-C 5V/9V/12V 3A max, 18W max; (1) USB-C 5V/9V/12V 3A, 20V 3.25A, PD 65W max

57

Includes

40V 300W Inverter





SC5364-00 PWRCORE 40™ autoPWRJUMP™ CHARGER

Features

-) autoPWRJUMP $^{\text{TM}}$ CHARGING BOOSTS THE BATTERY FROM 0 TO 30% POWER IN JUST 15 MINUTES*
-) FULLY CHARGES IN ONE HOUR*
- WALL MOUNTING HOLES
-) LED INDICATORS DISPLAY CHARGE STATUS
- COMPATIBLE WITH ALL SKIL 40V LITHIUM BATTERIES

*Based on 2.5Ah battery

Specifications

120V~60HZ
40V
All SKIL 40V batteries
Yes
60 mins for 2.5Ah battery; 120 mins for 5.0Ah battery

Includes

40V Auto **PWR**JUMP™ Charger



BY8708-00 PWRCORE 40[™] 40V 5.0AH BATTERY

Features

- PWRCORE 40™ LITHIUM TECHNOLOGY Industry-leading technology wraps each cell with cooling material for 25% longer runtime
-) PWRCORE 40™ LITHIUM BATTERY Patented techonology maximizes power and extends the battery life 2X longer
- PWRCORE 40™ SYSTEM All tools in the **PWR**CORE 40™ system use the same battery

Specifications

Voltage	40V
Capacity	5.0Ah
Indicator	Fuel Gauge
Energy Content (Wh)	200

Includes

40V 5.0Ah Battery



BY8705-00 PWRCORE 40[™] 40V 2.5AH BATTERY

- PWRCORE 40™ LITHIUM TECHNOLOGY Industry leading technology wraps each cell with cooling material for 25% longer runtime
-) PWRCORE 40™ LITHIUM BATTERY Patented techonology maximizes power and extends the battery life 2X longer
- PWRCORE 40™ SYSTEM All tools in the **PWR**CORE 40™ system use the same battery

Specifications

Voltage	40V
Capacity	2.5Ah
Indicator	Fuel Gauge
Energy Content (Wh)	100

Includes

40V 2.5Ah Battery



BY8723C-00 PWRCORE 40[™] 40V 6.0AH BATTERY

- PWRCORE 40™ LITHIUM TECHNOLOGY Industry-leading technology wraps each cell with cooling material for 25% longer runtime
- PWRCORE 40™ LITHIUM BATTERY Patented techonology maximizes power and extends the battery life 2X longer
- PWRCORE 40™ SYSTEM All tools in the **PWR**CORE 40™ system use the same battery

Specifications

Voltage	40V
Capacity	6.0Ah
Indicator	Fuel Gauge
Energy Content (Wh)	240

Includes

40V 6.0Ah Battery

BY8708C-01 PWRCORE 40[™] 40V 4.0AH BATTERY

Features

- PWRCORE 40™ LITHIUM TECHNOLOGY
- Industry leading technology wraps each cell with cooling material for 25% longer runtime
- PWRCORE 40™ LITHIUM BATTERY Patented techonology maximizes power and extends the battery life 2X longer
- PWRCORE 40™ SYSTEM All tools in the **PWR**CORE 40™ system use the same battery

Specifications

Voltage	40V
Capacity	4.0Ah
Indicator	Fuel Gauge
Energy Content (Wh)	160

Includes

40V 4.0Ah Battery

AVAILABLE COMBO KITS	DESCRIPTION	INCLUDED ITEMS
8	CB7478C-11 PWR CORE 40™ BRUSHLESS 40V 14 IN. STRING TRIMMER AND LEAF BLOWER COMBO KIT	40V String Trimmer 40V Leaf Blower 2.5Ah Battery Charger


HIGH PERFORMANCE CUTTING

Legendary power, cutting-edge innovation.

Whether you're cutting metal, wood, concrete, or all

of the above, SKIL® has the right saw for the job.



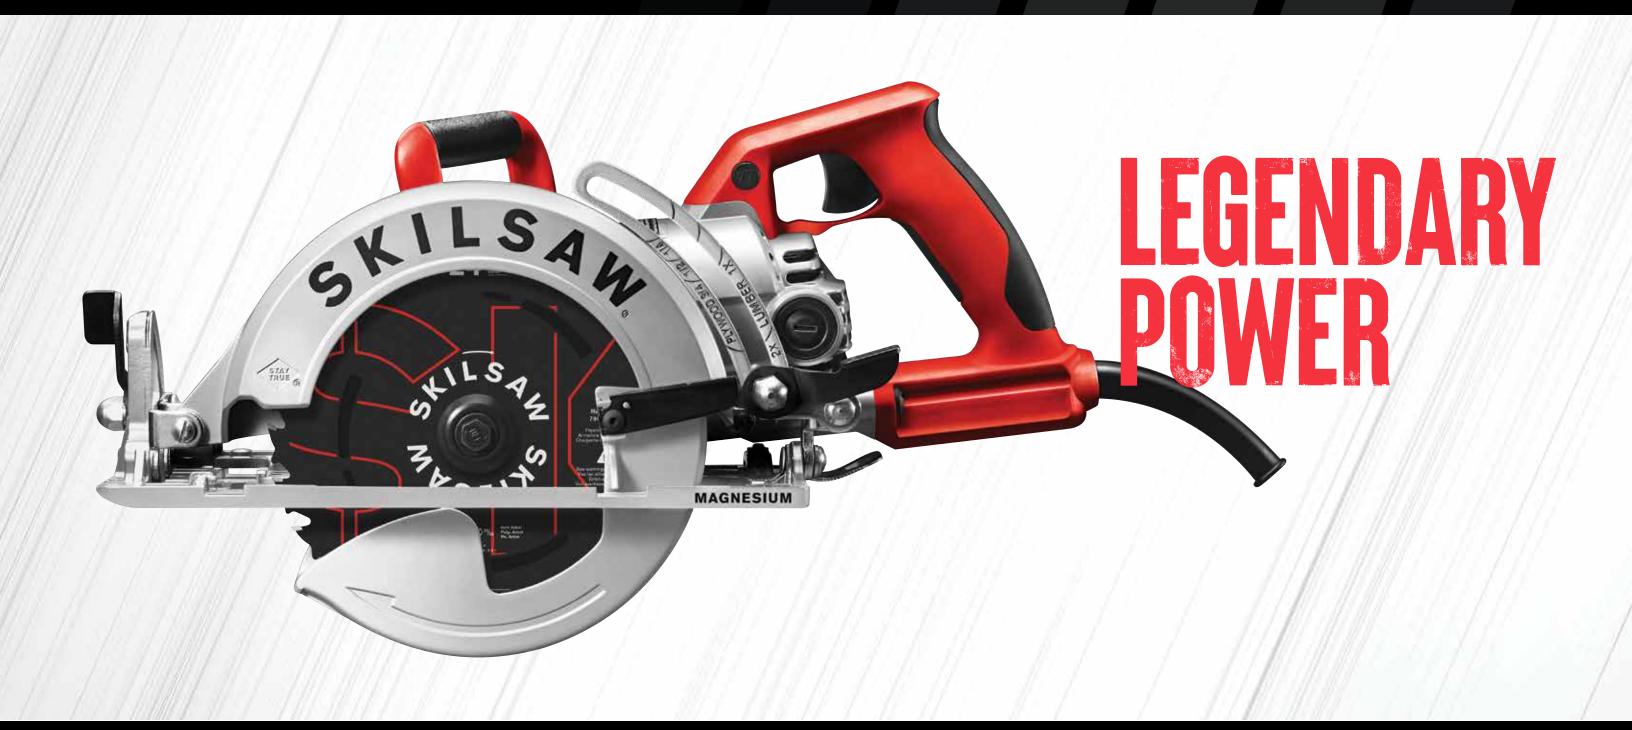





SPT77WML-01 7-1/4 IN. LIGHTWEIGHT WORM DRIVE SKILSAW

LIGHTEST WEIGHT MAGNESIUM DESIGN

Reduces user fatigue and dissipates

) POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life

) CUT READY™ DEPTH-OF-CUT SYSTEM

Assists with quick and accurate depth measurements

) IDEAL FOR FRAMING

DIABLO® BLADE CONFIGURATIONS:

SPT77WML-22, SPT77WML-72

Specifications

Ratings: 15A, 120V = 60 Hz, n₀ 5,300/min Magnesium guards, foot plate, housings

Capacities

2-3/8 in (60.3 mm) Max cut at 90°

- 1-15/16 in (49.2 mm) Max cut at 45°
- 1-11/16 in (42.8 mm) Max cut at 53°

Includes

24-Tooth SKILSAW® Carbide Blade, Multi-Function Wrench (stored in foot)



SPT77W-01 7-1/4 IN. WORM DRIVE SKILSAW

) POWERFUL DUAL-FIELD™ MOTOR

Increases cooling and extends tool life

) CUT READY™ DEPTH-OF-CUT SYSTEM Assists with quick and accurate depth measurements

- DURABLE STEEL FOOT CONSTRUCTION Stands up to jobsite demands
-) IDEAL FOR FORMING

DIABLO® BLADE CONFIGURATIONS: SPT77W-22, SPT77W-72

Ratings: 15A, 120V = 60 Hz, n₀ 5,300/min Aluminum upper guard and housings, steel

Capacities

2-13/32 in (61.1 mm) Max cut at 90°

1-3/4 in (44.4 mm) Max cut at 51°

Includes

Multi-Function Wrench (stored in foot)

foot plate, magnesium lower guard

1-31/32 in (50.0 mm) Max cut at 45°

24-Tooth SKILSAW® Carbide Blade.

SPT70V-11 16-5/16 IN. MAGNESIUM WORM DRIVE SKILSAW



Features

) IMPRESSIVE DEPTH-OF-CUT

To power through material up to 6-1/4 inches

) WORM DRIVE GEARING WITH ELECTRIC BRAKE Delivers relentless power for the biggest jobs

- MAGNESIUM DIE-CAST FOOTPLATE Ensures true cuts every time
-) IDEAL FOR 6X SINGLE PASS CUTTING

Specifications

Ratings: 15A, 120V = 60 Hz, n_o 2,500/min Magnesium guards, foot plate and gear housing Dust Port Diameter: 1-7/8 in.

Capacities

6-1/4 in (156 mm) Max cut at 90° 4-5/16 in (109 mm) Max cut at 45°

Includes

32-Tooth SKILSAW® Carbide Blade, with 1 in Round Arbor, Adjustable Auxiliary Handle, Multi-Function Wrench (stored in foot), Saw Stand



SPT78W-01 8-1/4 IN. ALUMINUM WORM DRIVE SKILSAW

EXTENDED 60-DEGREE BEVEL

Adds capacity for a wider variety of cuts

-) POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life
- WORM DRIVE DURABILITY

Combines worm drive gearing with all-metal components for job-site durability

) IDEAL FOR HIGHER CAPACITY FORMING

DIABLO® BLADE CONFIGURATIONS: SPT78W-22

Specifications

Ratings: 15A, 120V ~ 60 Hz, n₀ 4,700/min Aluminum guards and housings, steel

Capacities

2-7/8 in (73 mm) Max cut at 90°

2-1/4 in (57 mm) Max cut at 45° 1-1/2 in (38 mm) Max cut at 60°

Includes

24-Tooth SKILSAW® Carbide Blade, Multi-Function Wrench (stored in foot)







SPT55-11 16 IN. WORM **DRIVE CARPENTRY CHAINSAW**

Features

-) 14-1/4 INCH DEPTH OF CUT
- Powers through material in one pass
- **) WORM DRIVE GEARING WITH ELECTRIC BRAKE**
- Delivers relentless power and proven durability
-) FULL HOUSE CHAIN

Provides fast and accurate cuts with unmatched precision

) IDEAL FOR ACCURATE LARGE CAPACITY CUTTING

Specifications

Ratings: 15A, 120VAC, 60 Hz, n₀ 6,300/min Chain: 56-Tooth Full House, Bar Length: 16 in. (406 mm)

Capacities

14-1/4 in (362 mm) Depth of cut at 0° 8-3/4 in (222 mm) Depth of cut at 45° 5-1/2 in (138 mm) Depth of cut at 60°

Includes

SPT55 16 In. Worm Drive Carpentry Chainsaw, SKILSAW 56T Full House Chain, 16-inch Guide Bar, Auxiliary Handle, Saw Stand, Chain Sheath





SPT67M8-01 7-1/4 IN. LEFT BLADE SIDEWINDER™ SKILSAW

Features

- **)** LEFT BLADE SIDEWINDER™ Improves blade and cut line accuracy and visibility
-) ALL MAGNESIUM CONSTRUCTION Reduces user fatigue and adds durability
- POWERFUL DUAL-FIELD™ MOTOR
- Increases cooling and extends tool life
-) IDEAL FOR CUT-LINE VISIBILITY

Specifications

Ratings: 15A, 120V = 60 Hz, n₀ 5,300/min Magnesium guards & foot plate, resin housings

Capacities

2-7/16 in (62 mm) Max cut at 90° 1-7/8 in (47 mm) Max cut at 45° 1-1/2 in (38 mm) Max cut at 56°

Includes

24-Tooth SKILSAW® Carbide Blade, Multi-Function Wrench (stored in foot)

SPT70WM-01 10-1/4 IN. MAGNESIUM **WORM DRIVE SKILSAW**

IMPRESSIVE DEPTH-OF-CUT

Cuts 4X in one pass and tackles LVL, glulam, pine, and PSL

) POWERFUL DUAL-FIELD™ MOTOR

Increases torque with a larger motor for big cuts

) WORM DRIVE DURABILITY

Combines worm drive gearing with all-metal components for jobsite durability

DIABLO® BLADE CONFIGURATIONS:

SPT70WM-22, SPT70WM-72

Specifications

Ratings: 15A, 120V = 60 Hz, n0 4,700/min Magnesium guards, foot plate, and gear housing

Capacities

3-11/16 in (93.6 mm) Max cut at 90° 2-3/4 in (69.8 mm) Max cut at 45° 2-1/2 in (63.5 mm) Max cut at 51°

Includes

40-Tooth SKILSAW® Carbide Blade. Multi-Function Wrench (stored in foot), Multi-Position Handle





SPT67WL-01 7-1/4 IN. LIGHTWEIGHT SIDEWINDER™ SKILSAW

Features

-) ALL MAGNESIUM CONSTRUCTION Reduces user fatigue and adds durability
-) POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life
-) BEST-IN-CLASS TORQUE Improves productivity by increasing speed of cut
-) IDEAL FOR FRAMING / FORMING

Specifications

Ratings: 15A, 120V \simeq 60 Hz, $n_{\rm o}$ 5,300/min Magnesium guards, magnesium foot plate, magnesium housing

Capacities

2-7/16 in (62 mm) Max cut at 90° 1-7/8 in (47 mm) Max cut at 45° 1-1/2 in (38 mm) Max cut at 56°

Includes

24-Tooth SKILSAW® Carbide Blade, Multi-Function Wrench (stored in foot)



SPT78MMC-01 8 IN. WORM DRIVE SKILSAW FOR METAL

Features

) WORM DRIVE GEARING OPTIMIZED FOR METAL

Balances torque and speed to cut through metal

ONLY LEFT-BLADE SAW BUILT WITH SIGHT WINDOW

Adds visibility to make accurate cuts

LARGEST AVAILABLE CHIP TRAY
Holds 33% more for improved productivity

) IDEAL FOR METAL FABRICATION

DIABLO® BLADE CONFIGURATIONS:

SPT78MMC-22

Specifications

Ratings: 15A, 120V \simeq 60 Hz, $n_{\rm o}$ 3,900/min Magnesium Guards & Housings, Stainless Steel Foot, Resin Handles

Capacities

2-3/4 in. (70 mm) Max Cut at 90°

Includes

42-Tooth SKILSAW® Cardbide-Tipped Blade and Wrench (stored in foot)



SPT67WMB-01 7-1/4 IN. MAGNESIUM SIDEWINDER™ SKII SAW WITH BRAKE

Features

- **DELECTRIC CONVENIENCE BRAKE**Helps make repetitive cuts faster
-) ALL MAGNESIUM CONSTRUCTION Reduces user fatigue and adds durability
- POWERFUL DUAL-FIELD™ MOTOR Increases cooling and extends tool life
-) IDEAL FOR FRAMING / FORMING

DIABLO® BLADE CONFIGURATIONS: SPT67WMB-22

Specifications

Ratings: 15A, 120V \simeq 60 Hz, n_0 5,300/min Magnesium guards, magnesium foot plate, magnesium housing

Capacities

2-7/16 in (62 mm) Max cut at 90° 1-7/8 in (47 mm) Max cut at 45° 1-1/2 in (38 mm) Max cut at 56°

Includes

24-Tooth SKILSAW® Carbide Blade, Multi-Function Wrench (stored in foot)



SPT62MTC-22 12 IN. DRY CUT SAW

Features

COMPACT PORTABLE FRAME WEIGHING ONLY 38.2 POUNDS

Lightweight portability perfect for the shop or jobsite

PROFESSIONAL 15 AMP MOTOR WITH LARGE CUTTING CAPACITY

Stands up to jobsite applications

) SAW FEATURES CERMET-TIPPED BLADE TECHNOLOGY

For weld-ready and faster cuts than abrasive chop saws

IDEAL FOR THICK GAUGE METAL

Specifications

Ratings: 15A, $120V \approx 60$ Hz, n_0 1,500/min Aluminum guards & base, resin housing & handles

Capacities

4.53 in (115 mm) Max cut @ 90° for round pipe 3.94 in (100 mm) Max cut @ 90° for square stock 3.15 in x 6.22 in. (80 mm x 158 mm) Max cut @ 90° for rectangular stock

Includes

60-Tooth DIABLO® CERMET Carbide Blade, Wrench (stored in foot)



SPT67FMD-01 7-1/4 IN. SIDEWINDER™ SKILSAW FOR FIBER CEMENT

Features

UNIQUE DUST COLLECTION DESIGN

Channels silica dust away from the tool motor for longer life

) SEALED BEARINGS AND DUST-RESISTANT SWITCH

Protects the saw from silica dust for longer life

NO-MARD CORD SLEEVE
Keeps cord and hose out of the way

) IDEAL FOR FIBER CEMENT

DIABLO® BLADE CONFIGURATIONS: SPT67FMD-22

Specifications

Ratings: 15A, 120V \simeq 60 Hz, n_0 5,300/min Magnesium guards, magnesium foot plate

Capacities

2-7/16 in (62 mm) Max cut at 90° 1-7/8 in (47 mm) Max cut at 45° 1-1/2 in (38 mm) Max cut at 56°

Includes

4-Tooth SKILSAW® Blade for Fiber Cement, 8-foot Vacuum Hose with Nylon Sleeve, 1.5-inch Vacuum Hose Adapter, 2.5-inch Vacuum Hose Adapter, and Multi-Function Wrench (stored in foot)



SPT84-01 14 IN. ABRASIVE CUT-OFF SAW

Features

- LIGHTEST WEIGHT CHOP SAW AT 34 POUNDS
 Lightweight portability perfect for the shop or jobsite
- CUSTOM "D" HANDLE AND GUARD DESIGN
 Increases comfort and control
-) STAMPED STEEL GUARDS AND CHIP DEFLECTOR Improved chip management and jobsite durability
-) IDEAL FOR THICK GAUGE METAL

Specifications

Ratings:15A, 120VAC, 60 Hz, n₀ 3,800/min Steel Guards, Base & Vise, Die Cast Arm & Gear Housing, Resin Motor Housing & Handles

Capacities

5 in (127 mm) Max cut @ 90° for round pipe 4 1/2 in (114 mm) Max cut @ 90° for square stock 4 in x 7 5/8 in (101 mm x 193 mm) Max cut @ 90° for rectangular stock

Includes

14 In. SKILSAW® Metal Cutting Abrasive Wheel, Wrench (stored in base)

67



Features

accurate cuts

) LEGENDARY WORM DRIVE GEARING

Maximum torque for ripping applications

) RACK AND PINION FENCE SYSTEM

) POWERFUL AND COMPACT

) IDEAL FOR RIPPING

Make fence adjustments quickly and smoothly for

Cuts 3X with ease in a portable, lightweight design



Specifications Ratings:15A, 120VAC, 60 Hz n₀ 5,300/min All-metal roll cage design, die cast aluminum table topand rack & pinion fence

Capacities

2-5/8 in (68 mm) Max cut at 90° 1-7/8 in (48 mm) Max cut at 45° 25 in max rip capacity on right side of the blade

24-Tooth SKILSAW® Carbide Blade for Rip Cutting, Miter Gauge, Rack & Pinion Fence, Smart Guard System Including Anti-Kickback Device, Insert Plate, Push



Stick, Wrench



SPT79-00 7 IN. WORM DRIVE SKILSAW FOR CONCRETE

Features

FIRST WORM DRIVE CONCRETE SAW

Delivers a complete concrete cutting system with worm drive power and durability

-) CUT-READY™ ADJUSTABLE PLUNGE LOCK Quickly and easily sets straight plunge cuts
-) WET/DRY DUST MANAGEMENT SYSTEM WITH GFCI PROTECTION
- Controls dust for cleaner cuts and longer tool life
-) IDEAL FOR CONCRETE/MASONRY Decorative
 New Scoring
 Control Joints

Aluminum guards, foot plate, housings

Specifications

Capacities 2 in (50.8 mm) Max cut at 90°

Ratings: 15A, 120V ~ 60 Hz, n_o 4,700/min

Includes

GFCI, Vacuum Adapter with Clamp (fits 1-7/8 inch and 2-1/2 inch hoses), Water Feed Assembly, Multi-Function Wrench (stored in foot)



SPT79A-10 7 IN. WALK BEHIND WORM DRIVE SKILSAW FOR CONCRETE

Features

) WORM DRIVE CONCRETE SAW

Delivers a complete concrete cutting system with worm drive power and durability

) ADJUSTABLE HANDLE

Extends to optimal height and folds for easy transport

WET/DRY DUST MANAGEMENT SYSTEM WITH GFCI PROTECTION

Controls dust for cleaner cuts and longer tool life

-) IDEAL FOR CONCRETE/MASONRY
- New Scoring Control Joints Joint Repair Cleanout

Specifications

Ratings: 15A, 120V = 60 Hz, n₀ 5,100/min Aluminum guards, foot plate, housings

Capacities

2 in (50.8 mm) max cut at 90°

Includes

GFCI, Carry Bag, Triple Size Vacuum Adapter with Clamp (fits 3.5 cm, 1-7/8 inch and 2-1/2 inch hoses), Water Feed Assembly, Auxiliary Handle, Multi-Function Wrench (stored on foot)





SPT99-11 10 IN. HEAVY DUTY WORM DRIVE TABLE SAW WITH STAND

Features

3-1/2 INCH DEPTH OF CUT AND 30-1/2 INCH RIP CAPACITY

Cuts through 4X for increased productivity

) PRECISION RACK AND PINION FENCE SYSTEM Makes fence adjustments quickly and smoothly for accurate cuts

RUGGED ROLLING STAND WITH 16-INCH WHEELS Delivers unsurpassed mobility over stairs and rough jobsite surfaces

) IDEAL FOR JOBSITES

DIABLO® BLADE CONFIGURATIONS: SPT99-12

Specifications

Ratings: 15A, 120V \simeq 60 Hz, n_0 5,000/min Steel roll-cage design, die cast table top and side extension

Capacities

3-1/2 in (89 mm) depth of cut at 90° 2-1/4 in (58 mm) depth of cut at 45° 30-1/2 in max. rip capacity on right side of the blade 16-1/2 in max. rip to left of blade

Includes

30-Tooth SKILSAW® Carbide Blade for Rip Cutting, Miter Gauge, Smart Guard System Including Anti-Kickback Device, Dust Elbow, Insert Plate, Push Stick, Wrench, Rip Fence





SPT88-01 12 IN. WORM DRIVE DUAL BEVEL SLIDING MITER SAW

Features

) WORM DRIVE GEARING WITH ELECTRIC BRAKE

Delivers relentless power and proven durability

) LIGHTWEIGHT

For easy transportation

) SHADOW LIGHT

LED light casts a shadow to accurately align with

IDEAL FOR ACCURACY AND PORTABILITY

DIABLO® BLADE CONFIGURATIONS:

Specifications

Ratings: 15A, 120V = 60 Hz, n₀ 4,000/min Arbor: 1 in Diameter, Tool Weight: 51 lbs, Blade Diameter: 12 in

Capacities

Max. miter angle: 60° right, 50° left Max. bevel angle: 48° right and left

Miter detents: 0°, 15°, 22.5°, 31.6°, 45° right and

left, 60° right, 50° left

Bevel stops: 0°, 22.5°, 33.9°, 45°, 48° left and right

Includes

SKILSAW® 60-Tooth Carbide Blade, Left and Right Crown Stops with Fastening Knobs, Dust Bag, Dust Elbow, 2-size Allen Wrench, Miter Lock Knob, Clamp

SPT44-10 15 AMP HEAVY DUTY RECIPROCATING SAW



TOUGH 15 AMP MOTOR

Provides more power for all applications

) PATENTED BUZZKILL™ TECHNOLOGY

Delivers advanced inline vibration suppression

CONSTANT RESPONSE ELECTRONICS Supplies consistent power for the toughest cuts

) IDEAL FOR DEMOLITION

Specifications

Ratings: 15A, 120V = 60 Hz, n₀ 0-2900 SPM

Capacities

1-1/4 in (32 mm) stroke length

Includes

15 Amp Heavy Duty Reciprocating Saw, Carrying Case

SPT44A-00 13 AMP RECIPROCATING SAW



Features

) TOUGH 13 AMP MOTOR

Provides power for all applications

PATENTED BUZZKILL™ TECHNOLOGY

Delivers best-in-class inline vibration suppression

VARIABLE SPEED TRIGGER

Controls tool speed for cutting specialized materials

) IDEAL FOR DEMOLITION

Specifications

Ratings: 13A, 120V \simeq 60 Hz, n_0 0-2800 SPM

Capacities

1-1/8 in (28 mm) stroke length

Includes

13 Amp Reciprocating Saw

OUR MOTORS ARE BUILT FOR SAWS


+ Dual Copper Windings

Increases copper surface area by 40% to keep the motor cool

+ Dependable Motor

Cooler-running motor tackles the most difficult cuts

Dual-Field™ Motor OURS RUN COOLER

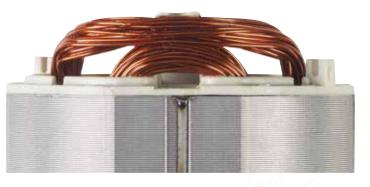







BENGHTOP AND GORDED TOOLS

Saws, Drills, Sanders & Grinders: everything you need to tackle any job.





BW9501-00 2.8 AMP 9 IN. BAND SAW

Features

) POWERFUL 2.8 AMP INDUCTION MOTOR

Powerful motor to rip through a variety of wood materials

) 2-SPEED DRIVE SYSTEM

Featuring tool-free belt tensioning

) RACK AND PINION TABLE ADJUSTMENT

For quick angle adjustments **QUICK BLADE TENSION SETTING**

Fast and accurate tension setting for clean cuts

) PRECISION BALL BEARING AND LOWER **BLADE GUIDES**

Ensure consistent tracking for accurate cutting performance

) DUST PORT

Accepts standard 2-1/2 inch vacuum hose, minimizing dust in work area

Specifications

Rating	2.8 Amps, 120V
Speed	1,700 FPM/2,500 FPM
Blade Type	1/4 in W x 59-1/2 in L x 6TPI
Cutting Capacity	Max. cutting height: 3-1/2 in Max. cutting width (throat size): 9 in
Table Size	12 1/4 x 12 in

Includes

9 in Band Saw

Miter Gauge

(2) Hex Wrench

Wrench Blade



BB9504-00 4.5 AMP BELT AND DISC COMBINATION SANDER

MITER GAUGE

Guides the workpiece when making crosscuts

) DUST PORT

Accepts standard 2-1/2 inch vacuum hose

) POWERFUL 4.5 AMP INDUCTION MOTOR Power through the toughest jobs with consistent sanding

) TWO-IN-ONE SANDING STATION

For sanding a variety of lengths and angles

) BELT ANGLE ADJUSTMENT

Allows for sanding 0-90 degrees

Specifications

Rating	4.5 Amps, 120V
Speed	3,600 RPM
Disc Size	6 in
Weight	8 lbs (3.6 Kg)
Disc Table Tilt	0-45°
Belt Size	4 x 36 in
Belt Tilt	0-90°

Includes

4.5 Amp Belt and Disc Combination Sander Miter Gauge

Hex Wrench



DP9505-00 6.2 AMP 10 IN. DRILL PRESS

) 5 SPEEDS 610-2,800 RPM

5-speed system for different material types

) LASER ALIGNMENT SYSTEM

Precisely execute drilling maneuvers

) ADJUSTABLE TABLE HEIGHT For easy depth control

) POWERFUL 6.2 AMP INDUCTION MOTOR

To power through wood, metal, and other materials

) LED WORKLIGHT

Illuminates your entire work space for up to 10 minutes

) ADJUSTABLE DEPTH STOP

For accurate and consistent depth during drilling

Specifications

Rating	6.2 Amps, 120V
Speed	610-2,800 RPM
Speed Settings	5
Drill on Centre	10 in
Chuck Size	1/2 in keyed
Table Tilt	0-45°
Table Size	7-3/5 in x 6-1/2 in

Includes

10 in Drill Press

(2) Hex Wrench Chuck Key



\$\$9503-00 1.2 AMP 16 IN. VARIABLE SPEED SCROLL SAW

) ELECTRONIC VARIABLE SPEED CONTROL

For cutting a variety of materials

) FOOT PEDAL

To allow the operator to keep both hands on the work piece at all times

) INTEGRATED LED WORKLIGHT

For greater visibility at a variety of angles

) INTEGRATED DUST REMOVAL SYSTEM

Keeps cut line free of debris for accurate cuts > TILTING 16 INCH X 10 INCH WORK TABLE

Tilts 0-45 degrees for precise cuts

Specifications

Rating	1.2 Amps, 120V
Speed	550-1,650 RPM
Throat Capacity	16 in
Stroke Length	3/4 in
Table Tilt	0-45°
Table Size	16 x 10 in

Includes

16 in. Scroll Saw

L Wrench S=2.5 L Wrench S=3

(2) Blades

BI9502-00 3.0 AMP 8 IN. BENCH GRINDER

Features

MAGNIFIED EYE SHIELDS

For better, protected visibility

) POWERFUL 3.0 AMP MOTOR

Provides continuous speed for consistent grinding

) BUILT-IN LED WORK LIGHT OVER BOTH WHEELS

For improved visibility

BUILT-IN WATER COOLING TRAY

For convenient cooling

Specifications

Rating	3 Amps, 120V
Speed	3,450 RPM
Diameter of Wheel	8 in
Arbor Diameter	5/8 in

Includes

8 in Bench Grinder

Hex Wrench



TS6307-00 15 AMP 10 IN. TABLE SAW

) RACK AND PINION FENCE RAILS

Ensures fence stays parallel to blade for fast, smooth,

) INTEGRATED FOLDING STAND

Legs quickly fold in to provide portability and convenient storage

) PARALLEL BLADE ALIGNMENT

Available micro-adjustment of blade so that it is parallel to rip fence and miter slot

) 4x4 CUTTING CAPACITY

Cuts material up to 4x4 at 90 degrees

) -2-47° BEVEL CAPACITY

Cuts between two positive stops at 0 and 45 degrees with quick release-lever

) DUST PORT ELBOW

Redirects dust to a container for easy cleanup

Specifications

Rating	15 Amps, 120V
Speed	4,600 RPM
Blade Size	10 in
Arbor Size	5/8 in
Depth of Cut at 45°	2-1/2 in
Depth of Cut at 90°	3-1/2 in
Bevel Cut	-2° - 47°
Cord Length	6 feet

Includes

Table Saw with Integrated Folding Stand Blade Guard

Riving Knife/ Push Stick Miter Gauge

Rip Fence 24T Blade

Dust Port Elbow

75

(2) Wrenches

Anti Kick-Back Pawl 74 www.skil.com





MS6305-00 10 IN. DUAL BEVEL SLIDING MITER SAW

) POWERFUL 15 AMP MOTOR

Delivers 5,000 RPM for quick, detailed cuts

) DUAL BEVEL

Perform cuts in four positive stop positions at 48 and 45 degrees left, 0 degrees, and 45 degrees right

Provides high-precision cuts with greater accuracy than lasers

2x12 CUTTING CAPACITY

Cross cuts lumber up to 2x12 at 90 degrees, and 2x8 lumber at 45 degrees

CUTS AT COMMON ANGLES

Cuts up to 50 degrees left and right with 11 positive stops at most used angles

) SLIDE RAIL SYSTEM

Linear bearings allow for smooth and accurate operation to cut

Rating	15 amps, 120V
Speed	4,800 RPM
Blade Diameter	10 in
Blade Arbor Size	5/8 in
Max Miter Angle	50° right, 50° left
Max Bevel Angle	45° right, 48° left
Miter Detents Left	0°, 15°, 22.5°, 31.6°, 45
Miter Detents Right	0°, 15°, 22.5°, 31.6°, 45
Bevel Stops Left	0°, 45°, 48°
Bevel Stops Right	45°

Includes

40T Carbide Blade Dust Bag Double-Ended Allen Wrench

Miter Lock Knob Carrying Handle (2) Carrying Handle Right Sliding Fence

Miter Saw

Work Clamp



3821-01 12 IN. QUICK MOUNT COMPOUND MITER SAW WITH LASER

Features

) QUICK-MOUNT SYSTEM

Allows for quick and easy setup on SKIL miter saw stand

) DIE-CAST ALUMINUM SLIDING FENCE

Supports tall pieces of wood

TRANSPORTABLE

Integrated carrying handle on top of saw for easy transport

) 15 AMP, 4,500 RPM

Cuts wood quickly and easily

) LASER CUTLINE WITH ON/OFF SWITCH

For accurate cuts every time

) LEFT/RIGHT EXTENSION RAILS

Supports longer and wider workpieces for better control

Specifications

Rating	15 Amps, 120V
Speed	4,500 RPM
Blade Diameter	12 in
Blade Arbor Size	1 in
Bevel	Single, left 0°-47°
Miter Angles	Left 0°-50°, right 0°-50°
Maximum Cutting Depth	3.5 in

Includes

Miter Saw Carbide Blade Extension Table (2) Extension Rails Vertical Clamp

Stop Block Miter Lock Knob **Dust Bag** Blade Wrench



RT1323-00 10 AMP FIXED BASE ROUTER

) SOFT START

Provides a safe and controlled start to routing

) SPEED CONTROL

Lets you adjust speed based on the material

) LIVE TOOL INDICATOR

Stay safe and alert with an indicator that lights up when the router is connected to power

DURABLE & ERGONOMIC

Die-cast motor housing and shaped handles provide superior grip and control

) FAST AND ACCURATE SETUP

Three coarse depth settings with micro-depth adjustment makes fast and accurate depth adjustments

Specifications

Rating	10 amps, 1-3/4 HP
Speed	10,000 - 25,000 RPM
Input	120V, 60HZ
Depth of Cut Adjustment	1-3/4 in
Fixed Base Diameter	6 in
Sub-Base Opening	1-1/4 in
Tool Size	10 x 6 x 9-1/4 in (255 x 152 x 235 mm)

Includes

Router

Parallel Guide Collet Wrench

Dust Extraction Adaptor

1/4 in and 1/2 in Collet





RT1322-00 14 AMP PLUNGE AND FIXED BASE DIGITAL ROUTER

) SPEED CONTROL LCD DISPLAY

Lets you select the bit type and material for suggested speed settings based on the task at hand

) ELECTRONIC FEEDBACK

Ensures motor maintains RPM while the material is being routed

) SOFT START

Provides a safe and controlled start to routing

) LIVE TOOL INDICATOR

Stay safe and alert with an indicator that lights up when plunge router is connected to power

) FAST AND ACCURATE SETUP

Three coarse depth settings with micro-depth adjustment makes fast and accurate depth adjustments

Specifications

Rating	14 Amps, 2.5 HP
Speed	10,000 - 25,000 RPM
LCD Screen	1 x 1.5 in
Fixed Base	3 Depth of cut positions, each with micro adjustment up to 1-1/4 in
Plunge Base Depth of Cut Adjustment	2 in
Fixed Base Diameter	6 in
Plunge Base Diameter	6-11/16 in

Includes

Adaptor

Router with Fixed Plunge Base Dust and Plunge Base Parallel Guide Fixed Base Dust Extraction

Extraction Adaptor Collet Wrench 1/4 in and 1/2 in Collet





SRT1039 ROUTER TABLE

Features

) ABOVE THE TABLE ROUTER LIFT

Gain convenient access to router bits

) INTEGRATED BIT STORAGE

Protect and store router bits with a double-door, quick-latch integrated bit case

PRECISION ROUTING

Router tool features a flat laying aluminum miter gauge slot, aluminum mounting plate, router clamp, and two featherboards for durable, accurate routing

) LARGE ALUMINUM FENCE

Handles tall stock with ease, complete with adjustable MDF face plates and a starter pin and guard for smooth operation

Specifications

MDF Table Size (LxW)	26 in x 16 in
Fence Length	24 in
Power Cord Length	6 feet
Dust Port on Fence	Fits Both Standard 2-1/2 in & 1-1/4 in Vacuum Hose

Includes

Router Table

(2) Featherboards

(3) Inserts Miter Gauge

Hex Key

Starting Pin

(10) Screws

5080-01 13 AMP 7-1/4 IN. CIRCULAR SAW

) 51-DEGREE BEVEL WITH POSITIVE STOP AT 45 DEGREES

Greater cut capacity

13 AMP 2.3 HP MOTOR

Easily cuts through a variety of materials

SPINDLE LOCK

Fast, convenient blade changes

) CONTOURED MAIN HANDLE

For comfort and control

) 18-TOOTH CARBIDE BLADE

Quick, quality cuts in common lumber and sheet goods

Specifications

13 Amps, 120V
5,300 RPM
2-7/16 in (61.9 mm)
1-15/16 in (49.2 mm)
7.0 lbs
6 feet (1.8 m)

Includes

7-1/4 In Circular Saw

18-Tooth Carbide Blade

5180-01 7-1/4 IN. CORDED CIRCULAR SAW

Features

) 51-DEGREE BEVEL WITH POSITIVE STOP AT 45 DEGREES

Greater cut capacity

) 14-AMP 2.4 HP MOTOR

Easily cuts through a variety of materials

SPINDLE LOCK

Fast, convenient blade changes

CONTOURED MAIN HANDLE For comfort and control

) 20-TOOTH CARBIDE BLADE

Quick, quality cuts in common lumber and sheet goods

) POWER-ON INDICATOR LIGHT

Specifications

Rating	14 amps, 120V
Speed	5,300 RPM
Max Cut Capacity	2-7/16 in (61.9 mm)
Max Cut at 45°	1-15/16 in (49.2 mm)
Tool Weight	7.2 lbs
Cord Length	6 feet (1.8 m)

Includes

7-1/4 In Circular Saw 20-Tooth Carbide Blade





5280-01 7-1/4 IN. CORDED CIRCULAR SAW WITH LASER

) 51-DEGREE BEVEL WITH POSITIVE STOP **AT 45 DEGREES**

Greater cut capacity

SPINDLE LOCK

Fast, convenient blade changes

CONTOURED MAIN HANDLE

For comfort and control

) 24-TOOTH CARBIDE BLADE

Quick, quality cuts in common lumber and sheet goods

) SAFETY LOCKOUT GUARDED TRIGGER

Protects against accidental starts

) SINGLE BEAM LASER

Specifications

Rating	15 Amps, 120V
Speed	5,300 RPM
Laser	Class Illa, 650 nm, < 5 mw
Max Cut Capacity	2-7/16 in (61.9 mm)
Max Cut at 45°	1-15/16 in (49.2 mm)
Tool Weight	8.7 lbs
Cord Length	6 feet (1.8 m)

Includes

7-1/4 In. Circular Saw

24-Tooth Carbide Blade

Carrying Bag

Wrench



9206-02 7.5 AMP VARIABLE SPEED **RECIPROCATING SAW**

Features

HEAVY-DUTY METAL GEAR HOUSING

For increased life and durability

) TOOL-FREE BLADE CHANGE

For easy blade changes

) PIVOTING FOOT

Provides stability when cutting through materials

) COUNTER BALANCE

For vibration control

) POWERFUL 7.5 AMP MOTOR

Power to get the job done

Specifications

Rating	7.5 Amps, 120V
Stroke	1-1/8 in (29 mm)
Speed	800-2,700 SPM
Tool Size	20.8 x 6 x 3.8 in (528 x 152 x 96 mm)
Weight	8 lbs (3.6 Kg)

Includes

Reciprocating Saw Wood Blade Allen Key



JS313101 5 AMP CORDED JIGSAW

Features

4 ORBITAL SETTINGS

For smooth cuts on a variety of materials

) TOOL-FREE BLADE CLAMP

For fast and secure changes of T- or U-shank blades

) DUST BLOWER SWITCH

Keeps cut line clear of dust

) VARIABLE SPEED TRIGGER WITH LOCK-ON

For continuous cutting

) 5-AMP MOTOR

Powerful for many applications

) BASE ADJUSTMENT BEVELING

Cut at different angles

Specifications

Rating	5 amps, 120V
Speed	0-3,000 SPM
Stroke Distance	3/4 in (18 mm)
Bevel Capacity	0° ± 45°
Blade Type	T- & U-Shank
Tool Size	9-1/3 x 3 x 8-1/8 in (237 x 77.6 x 206.5 mm)

Includes

Jig Saw Wood Blade

Metal Blade

Allen Kev



9216-01 9 AMP VARIABLE SPEED RECIPROCATING SAW

) HEAVY-DUTY METAL GEAR HOUSING

For increased life and durability

) TOOL-FREE BLADE CHANGE

For easy blade changes

) POWERFUL 9-AMP MOTOR

Ample power for the job) COUNTER BALANCE

For vibration control

POWER-ON INDICATOR

For safety and convenience

Specifications

Rating	9 Amps, 120V
Stroke	1-1/8 in (29 mm)
Variable Speed	800 to 2,700 SPM
Weight	7.2 lbs

Includes

Reciprocating Saw Wood Cutting Blade

JS314901 6 AMP CORDED JIGSAW

) 4 ORBITAL SETTINGS

For smooth cuts on a variety of materials

TOOL-FREE BLADE CLAMP

For fast and secure changes of T- or U-shank blades

) DUST BLOWER SWITCH

Keeps cut line clear of dust

VARIABLE SPEED TRIGGER WITH LOCK-ON For continuous cutting

) 6-AMP MOTOR

Powerful for many applications

) TOOL-FREE BASE ADJUSTMENT BEVELING Cut at different angles

) HALO LIGHT™

Provides 10X more light than common LEDs

Specifications

Rating	6 Amps, 120V
Speed	800-3,200 SPM
Stroke Distance	7/8 in (23 mm)
Bevel Capacity	0° ± 45°
Blade Type	T- & U-Shank
Tool Size	10.23 x 2.9 x 8.4 in (260 x 74 x 214 mm)

Includes

Jig Saw Wood Blade

Metal Blade



DL181901 7.5 AMP 1/2 IN. CORDED DRILL

Features

) 1/2-INCH HEAVY-DUTY METAL CHUCK

Accepts large diameter bits for heavy duty jobs

) POWERFUL 7.5-AMP MOTOR Tackle tough applications

VARIABLE SPEED TRIGGER

For increased control

) SIDE-ASSIST HANDLE

With depth rod for increased control in high torque applications

) LOCK-ON BUTTON

For extended drilling

) SOFT GRIP HANDLE For added comfort

Specifications

Rating	7.5 Amps, 120V
Chuck Size	1/2 in Keyed
Speed	0-950 RPM
Cord Length	6 feet (1.8 m)
Tool Size	14 x 3 x 8-5/8 in

81

Includes

Side Handle Depth Gauge

Chuck Key





HD182001 7.5 AMP 1/2 IN. CORDED HAMMER DRILL

Features

) 1/2-INCH HEAVY-DUTY METAL CHUCK Accepts large diameter bits for heavy duty jobs

POWERFUL 7.5-AMP MOTOR

Tackle tough applications

VARIABLE SPEED TRIGGER

For increased control

) SIDE-ASSIST HANDLE

With depth rod for increased control in high torque applications

) LOCK-ON BUTTON

For extended drilling

) SOFT GRIP HANDLE

For added comfort

) 2-IN-1 DRILLING FUNCTION

Easily switch between drilling and hammer drilling

Specifications

7.5 amps, 120V
1/2 in keyed
0-3,000 RPM
6 feet (1.8 m)
0-48,000 IPM
12-5/8 x 3 x 8-7/8 in (319 x 77 x 226 mm)

Includes

Hammer Drill Side Handle Depth Gauge Chuck Key



7510-01 3 X 18 IN. 6 AMP BELT SANDER

Features

MICRO-FILTRATION CANISTER

Captures and contains fine dust particles

PRESSURE CONTROL TECHNOLOGY

Monitors sanding belt pressure applied for optimal results

) AUTO-TRACK SYSTEM

Keeps belt centered on track

) TRIGGER LOCK-ON

) SINGLE-LEVER BELT CHANGES

Specifications

Rating	6 amps, 120V
Belt Speed	1,050 SFPM
Belt Size	3 x 18 in (76 x 457 mm)
Vacuum Port	Fits 1-1/4 in hose
Weight	6.4 lbs

Includes

Belt Sander

3 x 18 ln. 80 Grit Sanding Belt

Clear-View Dust Canister



6239-01 5.5 AMP 3/8 IN. CORDED DRILL

Feature

) KEYLESS CHUCK

For fast and easy bit changes

) NON-SLIP BUMPERS

Protects tool and surfaces

) FORWARD / REVERSE OPERATION

For ease of use

) SOFT GRIP

For better balance and control

) HORIZONTAL BUBBLE LEVEL

For precise and accurate drilling

) 5.5-AMP MOTOR

Powerful motor ideal for tough applications

Specifications

Rating	5.5 amps, 120V
Speed	0-2,700 RPM
Chuck	3/8 in, 2-sleeve keyless
Cord Length	6 feet (1.8 m)

Includes

Drill



SR232301 CORDED MULTI-FUNCTION DETAIL SANDER

Features

) LOW VIBRATION

Its ergonomic design, soft rubber grip, and counterweight balance reduce hand fatigue from vibration

HOOK & LOOP SYSTEM

For simple and quick sanding sheet changes

MULTI-FUNCTION

Comes with additional detail attachments for fine finishing large surfaces, corners, edges, and hard to reach areas

) MICRO-FILTRATION SYSTEM

Captures and contains fine dust particles

) 1.2-AMP MOTOR

Delivers a smooth performance over a variety of sanding applications with 13,500 OPM

Specifications

Rating	1.2 amps, 120V
Pad Size	4 x 5-3/4 in
Speed	13,500 OPM
Sandpaper Attachment Method	Hook & loop
Tool Size	7-7/8 x 4 x 5-5/8 in

Includes

Multi-Sander

12 pcs 120 Grit Sandpaper

Dust Canister

Finger Attachment

Louver Attachment
Unique Flexible Attachment



PL201201 6.5 AMP 3-1/4 IN. PLANER

Features

) DUAL DUST PORTS

Keeps the workspace free of sawdust for better visibility

) ONBOARD WRENCH STORAGE

Always have the wrench in reach

LOCK OFF SAFETY SWITCH

Prevents unintended start ups

> SMOOTH KICKSTAND

Prevents blade from scratching finished surfaces

Specifications

	Rating	6.5 amps, 120V
	Blade Width	3-1/4 in
	Speed	16,000 RPM
	Max Cutting Depth in Single Pass	5/64 in
	Depth Adjustment Amount	1/128 in
	Max Rabbet Depth	5/16 in
	Cord Length	6 feet
	Tool Size	11.6 x 6.4 x 6.9 in

Includes

Planer Spanner
Parallel Guide Rabbet Fence
Dust Bag Adaptor



SR211601 5 IN. CORDED RANDOM ORBITAL SANDER

Features

) VARIABLE SPEED CONTROL

Provides the right amount of power and control across dierent materials

) DUST SEALED POWER SWITCH

For extended tool life

> X-FLOW DUST COLLECTOR

Collects dust using cyclone force into an easy-to-empty transparent container

) LOW VIBRATION

Its ergonomic design, soft rubber grip, and counterweight balance reduce hand fatigue from vibration

) 2.8 AMP MOTOR

Delivers a smooth performance over a variety of sanding applications with 13,000 OPM

Specifications

Rating	2.8 amps, 120V
Pad Size	5 in
Speed	7,000-13,000 OPM
Sandpaper Attachment Method	Hook & loop
Tool Size	7-7/8 x 4-4/5 x 5-1/2 in

83

Includes

Random Orbital Sander 3 pcs 120 Grit Sandpaper Dust Canister



7292-02 1/4 SHEET SANDER WITH PRESSURE CONTROL

Features

DUST SEALED SWITCH

For extended tool life

PRESSURE CONTROL TECHNOLOGY
Helps to produce professional results

MICRO-FILTRATION CANISTER

Captures and contains fine dust particles

) BUILT-IN VACUUM ADAPTER

Specifications

Rating	2 amps, 120V
Speed	14,000 OPM
Vacuum Port	Fits 1-1/4 in Hose
Weight	2.6 lbs

Includes

1/4 Sheet Palm Sander Paper Punch Plate

2 Sheets of Abrasive Paper



SR250801 CORDED DETAIL SANDER

Features

DUST SEALED ON/OFF SWITCH

For control and durability

) VIBRATION CONTROL

Counterweight balance minimizes vibration

) HOOK & LOOP ATTACHMENT

Quick and easy sanding sheet changes

COMPACT & LIGHTWEIGHT

Use for a variety of detail applications

) MICROFILTRATION DUST CANISTER Captures fine dust particles

Specifications

Rating	120V, 1.0A
Speed	12,000 OPM
Pad Size	4 x 5-3/4 in (102 x 146 mm)
Dust Port	Fits 1-1/4 in vacuum hose
Weight	1.77 lbs (0.8 Kg)

Includes

Detail Sander

3 pcs 120 Grit Sand Paper

Dust Box



AG242001 8 AMP 5 IN. CORDED ANGLE GRINDER

Features

) 3-POSITION SIDE HANDLE WITH WRENCH STORAGE

Allows for greater control

) HEAVY-DUTY METAL GEAR HOUSING

For increased life and durability

) TOOL-FREE GUARD ADJUSTMENT

For quick guard changes

) POWERFUL 8-AMP MOTOR

Power to get the job done

> FITS 5-INCH DISCS

) PADDLE SWITCH CONTROLS

Specifications

Rating	8 amps, 120V
Speed	12,000 RPM
Disc Size	5 in (125 mm)
Cord Length	6 feet (1.8 m)
Tool Size	14 x 5-11/16 x 4-7/16 in (356 x 144 x 112 mm)
Weight	4.85 lbs (2.2 kg)

Includes

Angle Grinder Grinding Disc

Wrench Storage Handle

Grinding Guard

Wrench



9295-01 4-1/2 IN. ANGLE GRINDER

Features

) 3-POSITION SIDE HANDLE WITH WRENCH STORAGE Allows for greater control

) HEAVY-DUTY METAL GEAR HOUSING

For increased life and durability

) TOOL-FREE GUARD ADJUSTMENT

For quick guard changes

POWERFUL 6-AMP MOTOR Power to get the job done

Specifications

Rating	6 amps, 120V
Speed	11,000 RPM
Disc Size	4-1/2 in (115 mm)
Cord Length	6 feet (1.8 m)
Tool Size	10-3/4 x 5 x 4-3/8 in (272 x 126 x 108 mm)
Weight	4.65 lbs (2.11 kg)

Includes

Angle Grinder Grinding Disc Side Handle



85

INCLUDED ITEMS





3540-02 7 IN. WET TILE SAW

-) STAINLESS STEEL TABLE TOP Resistant to corrosion
- ADJUSTABLE RIP FENCE WITH MITER GAUGE For accurate straight and miter cuts
-) BEVEL CUTS TILE FROM 0 TO 45 DEGREES Flexibility for dierent cut types
-) 7-INCH CONTINUOUS RIM DIAMOND BLADE Provides fast and smooth cutting
-) BLADE COOLING WATER RESERVOIR

Keeps blade cool and minimizes dust and debris

Specifications

Rating	4.2 amps, 120V
Speed	3,600 RPM
Blade	7 in diameter diamond
Bevel Stops	0° and 45°
Miter Gauge	0° to 45°
Weight	18 lbs

AVAILABLE COMBO KITS

DESCRIPTION

Includes

Wet Tile Saw

7 in Diamond Blade

Blade Guard

Blade Wrenches



3550-02 7 IN. WET TILE SAW WITH HYDRO LOCK SYSTEM

- HYDRO LOCK WATER CONTAINMENT SYSTEM Keeps water contained near the blade and reduce clean up time
-) SLIDING SIDE EXTENSION

Provides support for tiles up to 18 x 18 inches

- **ALUMINUM TABLE TOP**
- Durable, rust-resistant surface
-) ADJUSTABLE RIP FENCE WITH MITER GAUGE For accurate straight and miter cuts
-) BEVEL CUTS TILE AT 0, 22.5, AND 45 DEGREES Gives flexibility for different cut types

Specifications

Rating	5 amps, 120V
Speed	3,600 RPM
Blade Size	7 in
Bevel Stops	0°, 22.5°, 45°
Max Tile Size	18 x 18 in
Miter Angle	0°-45°
Weight	18 lbs

Includes

- 7 in Wet Tile Saw
- 7 in Diamond Blade



3601-02 7 AMP FLOORING SAW

Features

- CUTS SOLID, ENGINEERED, AND LAMINATE FLOORING WITH EASE
- MAKES CROSS, MITER, AND RIP CUTS
- LIGHTWEIGHT DESIGN FOR TRANSPORT AND **USE AT ANY PROJECT LOCATION**
- MITER DETENTS AT 0, 22.5, AND 45 DEGREES

Specifications

Rating	7 amps, 120V
Speed	11,000 RPM
Blade	4-3/8 in / 36-tooth carbide tipped blade

Includes

Flooring Saw

4-3/8 in 40-Tooth Carbide-Tipped Contractor Blade

Self-Aligning Rip/Miter Fence

Blade Wrench Clamp

Push Stick

RT1323-01 ROUTER TABLE AND FIXED BASE ROUTER KIT	Router Router Table Parallel Guide Collet Wrench Dust Extraction Adaptor 1/4 in and 1/2 in	Collets (2) Featherboards (3) Inserts Miter Gauge Hex Key Starting Pin (10) Screws
SKIL		
nhammanham		



LASERS & LEVELS

Quickly and accurately align your work with everything you need from distance measuring to leveling tools.

- Self-Leveling
- Rechargeable Lithium-Ion Battery
- Green Lasers for Better Visibility
- Highly Accurate



LL932401 SELF-LEVELING GREEN CROSS LINE LASER WITH PROJECTED MEASURING MARKS

Features

PROJECTS UP TO 65 FEET

Projects bright green horizontal and vertical lines onto surfaces plus includes projected measuring marks

) PROJECTED MEASURING MARKS

Measuring marks cross the horizontal and vertical lines at even intervals and make it easy to tackle jobs that require equal spacing—like painting stripes or hanging multiple pictures or shelves

) INCLUDES CLAMP AND CASE

Specifications

Working Range	Up to 65 feet
Laser Type	Green beam, Class II, 520nm, <1mW
Power Supply	3.7V, 1.2Ah integrated lithium-ion battery
Accuracy	± 3/16 In at 30 feet
Mount Threading	1/4 In -20 UNC

Includes

Green Beam Compact Self-Leveling Cross Line Laser with Projected Measuring Marks

USB Charging Cable

Soft Bag



LL932201 SELF-LEVELING 360 DEGREE RED CROSS LINFLASER

Features

) SELF-LEVELING

Laser level automatically levels to cuts out any guesswork

PROJECT UP TO 65 FEET

Project a bright red continuous horizontal line, around a room, up to 65 feet, for projects like installing molding, cabinets, and more

) PROJECT LINES AT ANY ANGLE

Locking mode for projects where your lines are not level or plumb, like a diagonally tiled backsplash

) CONVENIENT CHARGING

The integrated rechargeable lithium-ion battery has a convenient micro USB charging port

) TRIPOD & CASE INCLUDED

Tripod adjusts to a max height of 31/2 feet; position on the floor or table

Specifications

Working Range	Up to 65 feet
Laser Type	Red beam, Class II, 635nm, <1mW
Power Supply	3.7V, 1.2Ah integrated lithium-ion battery
Accuracy	± 3/16 In at 30 feet
Mount Threading	1/4 in -20 UN

Includes

Self-Leveling 360 Degree Red Cross Line Laser Soft Bag

43-inch Tripod

USB Charging Cable



LL9322G-01 SELF-LEVELING 360 DEGREE GREEN CROSS LINE LASER WITH TRIPOD

Features

) PROJECTS UP TO 100 FEET

Laser projects a bright green cross line laser with a 360 horizontal laser that goes all the way around a room

The bright green laser lines offer improved visibility for ease of measuring

Laser level automatically levels to cut out any guesswork

) CONVENIENT CHARGING

The integrated rechargeable lithium-ion battery has a micro USB charging port with indicators displaying the battery's life

) TRIPOD INCLUDED

The adjustable tripod can be raised up to a max height of 3-1/2 feet and lets you securely position the tool on the floor or a table

Specifications

Working Range	Up to 100 feet
Laser Type	Green beam, Class II, 520nm, <1mW
Power Supply	3.7V, 2.0Ah integrated lithium-ion battery
Accuracy	± 3/16 In at 30 feet
Mount Threading	1/4 in -20 UN

Includes

Self-Leveling 360 Degree Green Cross

Soft Bag

43-inch Tripod USB Charging Cable

LL932301 SELF-LEVELING RED CROSS LINE LASER

Features

PROJECTS UP TO 50 FEET

Projects a bright red horizontal and vertical line onto surfaces to align and install projects like cabinets, trim, or chair rail molding

) SELF-LEVELING

Automatically levels to cut out any guesswork

CONVENIENT CHARGING

Integrated rechargeable lithium-ion battery has a convenient micro USB charging port

) INCLUDES CLAMP AND CASE

Specifications

Working Range	Up to 50 feet
Laser Type	Red beam, Class II, 635nm, <1mW
Power Supply	3.7V, 1.2Ah integrated lithium-ion battery
Accuracy	± 3/16 in at 30 feet
Mount Threading	1/4 in -20 UN

Includes

Red Beam Compact Self-Leveling Cross Line Laser Clamp USB Charging Cable Soft Bag



Features

) PROJECTS UP TO 65 FEET

This laser level tool projects a bright green horizontal and vertical line onto surfaces to align and install projects like

) SUPERIOR VISIBILITY

The bright green laser lines offer superior visibility

) SELF-LEVELING

Automatically levels to cut out any guesswork

) CONVENIENT CHARGING

The integrated rechargeable lithium-ion battery has a convenient micro USB charging port and indicators that show when the battery is running low

) CLAMP INCLUDED

Attaches to the top or bottom of the laser for easy, secure placement

Specifications

Working Range	Up to 65 feet
Laser Type	Green beam, Class II, 520nm, <1mW
Power Supply	3.7V, 1.2Ah integrated lithium-ion battery
Accuracy	± 3/16 In at 30 feet
Mount Threading	1/4 in -20 UN

Includes

Green Self-Leveling Cross Line Laser Clamp USB Charging Cable Soft Bag



8101-SL MULTI-FUNCTIONAL LINE LASER

Features

BRIGHT LASER LINE Leveling made easy

) TWO BACKLIT BUBBLE VIALS Easily level the tool

) MAGNET ACCESSORY

Attaches the tool to any metal surface

) ADHESIVE PUTTY

Attaches tool to drywall, wood, and other surfaces

) PROTRACTOR ACCESSORY

For tile and floor aligning projects

Specifications

Laser Type	Class II, 635 nm
Max Output	1 mW
Power Supply	3 x AG13 button cell
Accuracy	\pm 1/4-in at 10 feet (deviation of \pm 10 mm at 5 m)

Includes

Protractor Accessory Magnet Accessory Button Cell Batteries Adhesive Putty





ME981901 100 FT. LASER DISTANCE MEASURER & LEVEL

Features

) THREE WAYS TO MEASURE

Laser measures distance, area. or in real time up to 100 feet

) DIGITAL LEVELING MODE

Digital accuracy with real-time arrow guidance

) INDIRECT MEASURING

Calculates distances past obstacles

) HOLD FEATURE

Save readings for later reference

) RECHARGEABLE LITHIUM-ION BATTERY

Easily charge via a micro USB port

Specifications

Measuring Range	Up to 100 feet
Distance Measuring Accuracy	±1/8 in
Angle Measuring Accuracy	±0.5°
Units	Metric and imperial

Includes

100-foot Laser Measurer & Digital Level

Micro-USB Charging Cord



LV941901 24 IN. DIGITAL LEVEL

) HIGH-CONTRAST BLUE VIALS

Easy to see and accurate

DIGITAL LCD SCREEN Backlit for easy reading

) LEVEL INDICATORS

Real-time leveling guidance

MEMORY FEATURE

Store values for reference

MAGNETIC EDGE

For easy one-handed use

Specifications

Digital Screen	High visibility
Blue Vials	High contrast
Accuracy of Digital Angle	±0.2°
Angle Indication	Degrees, in/ft, mm/m and %
Power Supply	2 AAA batteries
Length	24 in excluding endcaps

Includes

24 in Digital Level

Bag

(2) AAA Batteries



ME9821-00 65 FT. LASER MEASURER WITH WHEEL

Features

) POINT & CLICK LASER DISTANCE MEASURING

Measure distances up to 65 feet, use continuous measuring to find a target distance, and calculate area

WHEEL MEASURING MODE

Easily measure uneven and curved surfaces with wheel measuring

) BACKLIT LCD SCREEN

Easy-to-read screen clearly displays mode and measurements in real time

Specifications

Measuring Range	65 feet (20 m)
Measuring Accuracy	±1/8 in (±3mm)
Laser Type	Red beam, 630-670nm class 2, <1mW
Display	Auto-backlit, white on black
Auto Shut-Off	5 minutes

Includes

(2) AAA Batteries

Measuring Range	65 feet (20 m)
Measuring Accuracy	±1/8 in (±3mm)
Laser Type	Red beam, 630-670nm, class 2, <1mW
Display	Auto-backlit, white on black
Auto Shut-Off	5 minutes

Laser Distance Measure Soft Case Lanyard



LV941801 12 IN. DIGITAL LEVEL

) HIGH-ACCURACY BLUE VIALS

The vials are easy to see, highly accurate, and show both vertical and horizontal levels

READ FROM ANY PERSPECTIVE

The digital LCD screen is backlit for easy reading from any perspective, and the screen conveniently autoadjusts the orientation depending on how you hold it

) EASY TO USE

Up and down arrow indicators give you real-time leveling guidance, and an optional audible tone lets you know when you hit 0, 45, or 90 degrees

) ONE-HANDED CONVENIENCE

A magnetic edge makes it easy to use with just one hand

) DUAL MEASURING

See centimeters on one side and inches on the other

Specifications

Size	12 in (30 cm)
Digital Level Accuracy	±0.05° at 0° & 90°, ±0.2° at other angles
Display	Auto-backlit, black on white
Auto Shut-Off	5 minutes
Tool Size	14 x 1.22 x 2.5 in (355 x 31 x 63 mm)
Weight	0.97 lbs (0.44 kg)

Includes

12 in Digital Level

Soft Bag

(2) AAA Batteries

LL9325-00 COMPACT DIGITAL LEVEL WITH LINE LASER



) INSTANT ACCURACY

Level provides real-time leveling guidance on an easyto-read digital display

) ALIGN WITH EASE

Laser line projects on the wall or floor. Includes protractor for use on flooring

) COMPACT SIZE

Compact and lightweight design allows you to level in tight spots and bring it along when on-the-go

) ONE-HANDED CONVENIENCE


A magnetic edge makes the laser level easy to use with just one hand

Specifications

Working Range	Up to 15 feet
Laser Type	Class II, 635nm, <1 mW
Level Accuracy	±0.1° at 0° and 90°

Includes

Digital Level Line Laser Adhesive Putty Magnetic Wall-Mount Base Protractor with 0° to 90° Marks (2) AAA Batteries

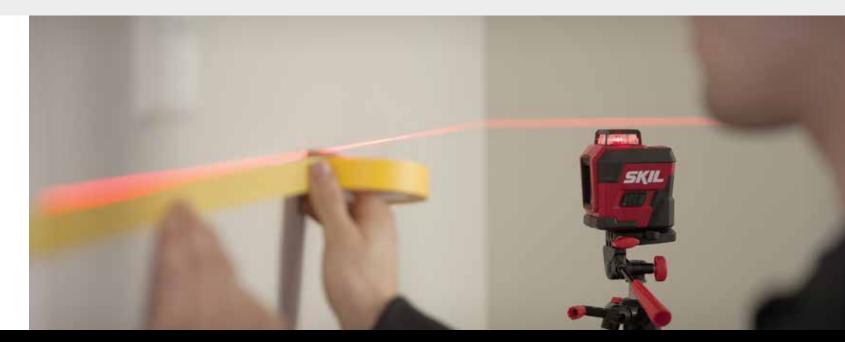






4V SCREWDRIVERS

From assembling furniture and toys to tightening screws in hard-to-reach cabinets, get small jobs and repairs done quickly and comfortably.

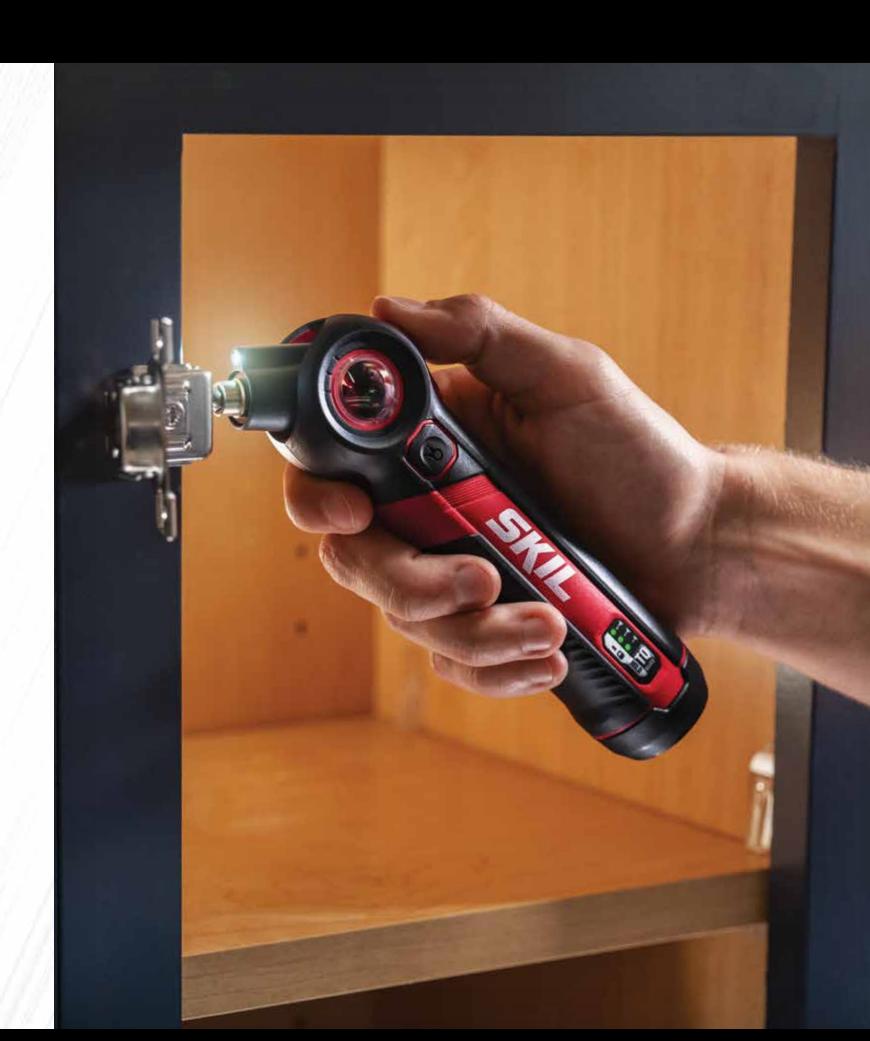







SD5619-01 TWIST 2.0 RECHARGEABLE 4V SCREWDRIVER WITH 2 PC BIT KIT

Features

PIVOTING HEAD WITH LOCK OFF

Pivots and locks between three positions (0, 22.5, and 45 degrees) for improved ergonomics in tight spaces

TORQUE SETTING CONTROL

Adapt to the application at hand with three torque settings

) FORWARD & REVERSE TRIGGER BUTTON

Conveniently located for easy one-finger use

) LED LIGHT

For added visibility in low light conditions

) INTEGRATED BATTERY WITH USB-C CHARGING PORT

For convenience and ease of use

Specifications

•	
LED Light	Yes
Collet	1/4 in hex
Torque (Soft)	22 in-lbs/2.5 Nm
Number of battery cells	1
No Load Speed	240 RPM
Voltage	4V

Includes

Screwdriver USB-A to USB-C Charging Cable (2) 2 in bits



SD5619-02 TWIST 2.0 RECHARGEABLE 4V SCREWDRIVER WITH 28 PC BIT KIT

Features

) PIVOTING HEAD WITH LOCK OFF

Pivots and locks between three positions (0, 22.5, and 45 degrees) for improved ergonomics in tight spaces

) TORQUE SETTING CONTROL

Adapt to the application at hand with three torque settings

) FORWARD & REVERSE TRIGGER BUTTON

Conveniently located for easy one-finger use

) LED LIGHT

For added visibility in low light conditions

) INTEGRATED BATTERY WITH USB-C CHARGING PORT

For convenience and ease of use

Specifications

LED Light	Yes
Collet	1/4 in hex
Torque (Soft)	22 in-lbs/2.5 Nm
Number of battery cells	1
No Load Speed	240 RPM
Voltage	4V

Includes

Screwdriver

USB-A to USB-C Charging Cable

Plastic Case

28-Piece Bit Kit



SD561201 RECHARGEABLE 4V SCREWDRIVER WITH CIRCUIT SENSOR™ TECHNOLOGY

Features

PATENTED CIRCUIT SENSOR™ TECHNOLOGY Safely detects electrical current in outlets, switches, and fixtures

) FORWARD & REVERSE COLLAR

Easily change bit direction with a twist of the collar

) INTEGRATED RECHARGEABLE LITHIUM-ION BATTERY

Micro USB charging is ready when you are

) CINCH LOCK™ COLLET

For fast and convenient bit changes

) DUAL LED LIGHTS

Improves use in low light, with after glow

) AUTO SPINDLE LOCK

Bit locks for convenient manual use

Specifications

Speed	230 RPM
Battery Type	Integrated lithium-ion
Battery Capacity	1.3Ah
Collet Size	1/4 in

Includes

4V Screwdriver with Circuit Sensor™ Technology

USB Charging Cable

9-Piece Bit Kit

Magnetic Insert Bit Holder



SD561204 RECHARGEABLE 4V SCREWDRIVER WITH CIRCUIT SENSOR™ TECHNOLOGY AND 45 PC BIT KIT

) PATENTED CIRCUIT SENSOR™ TECHNOLOGY Safely detects electrical current in outlets, switches. and fixtures

) FORWARD & REVERSE COLLAR

Easily change bit direction with a twist of the collar

) INTEGRATED RECHARGEABLE LITHIUM-ION BATTERY

Micro USB charging is ready when you are

DUAL LED LIGHTS

Improves use in low light, with after glow

) AUTO SPINDLE LOCK

Bit locks for convenient manual use

) 45-PIECE BIT KIT INCLUDED

Specifications

Speed	230 RPM
Battery Type	Integrated lithium-ion
Battery Capacity	1.3Ah
Collet Size	1/4 in.

Includes

4V Screwdriver with Circuit Sensor™ Technology

USB Charging Cable

45-Piece Bit Kit

Magnetic Insert Bit Holder

Slim Magnetic Bit Grip Collar



SD561801 RECHARGEABLE 4V SCREWDRIVER

Features

) 1/4-INCH HEX DRIVE

Securely holds standard 1/4-inch bits

) RECHARGEABLE LITHIUM-ION BATTERY

Convenient micro USB charging

CHARGING INDICATOR

Light displays charging status

) FORWARD/REVERSE INDICATOR Light displays charging status

Specifications

Voltage	4V
Chuck	6.35 mm (1/4 in) hex chuck with magnetic function
No-Load Speed	220 RPM
Tool Size	5.7 x 1.9 x 5 in
Net Weight	0.81 lbs (0.37 kg)

Includes

4V Screwdriver

3 in Magnetic Bit Holder

9-Piece Bit Kit

USB Charging Cable

USB Adapter

SD5618-03 RECHARGEABLE 4V SCREWDRIVER WITH 42 PC BIT KIT **Specifications Features**

) LITHIUM-ION BATTERY

Power up your electric screwdriver anywhere with a 4V rechargeable lithium-ion battery and micro USB charger

This power screwdriver was designed for your everyday home and DIY projects

) SLIM BIT GRIP COLLAR

4X the magnetic force to hold screws securely for one-handed use; pair with included slim bits

) CAM SCREW SLEEVE

Provides quick and easy support for cam screws in ready to assemble furniture

) DUAL MAGNETIC BIT STORAGE

Compact for convenient, ready to go storage

Chuck	1/4 in hex
Torque	36 in-lbs
Speed	220 RPM
Integrated Battery	4V
Charge Time	3 hours
Bit Kit	42 pieces

Includes

4V Rechargeable Screwdriver

42-Piece Bit Kit

Charging Cable

Charging Adapter



SD561802 RECHARGEABLE 4V PIVOT GRIP SCREWDRIVER

Features

) EASY TO USE

The perfect power screwdriver for everyday needs and DIY projects

) PIVOT GRIP HANDLE

Adjusts to both straight and standard grips depending on your project

) FORGET DOWN TIME

A rechargeable lithium-ion battery keeps this tool charged over an extended period of time

) READY TO GO

Power up your electric screwdriver anywhere with micro USB charging

Specifications

Speed	220 RPM
Torque	36 in-lbs
Chuck	1/4 in hex
Tool Size	6.5 x 1.8 x 4.8 in (166 x 45 x 123 mm)
Weight	0.77 lbs (0.35 kg)

Includes

4V Pivot Grip Screwdriver

(9) 1 in Bits

3 in Magnetic Bit Holder

USB Charging Cable

USB Adapter







ACCESSORIES

Get the most out of your tools with bits, blades, and more for all of your projects.





TSM0001-3 SUITCASE AND ORGANIZER BOX 3 PC SET

-) STACKABLE INTERLOCKING LATCH
-) IP54 PROTECTION
-) SECURITY PADLOCK HOLE
-) REMOVABLE DIVIDERS INCLUDED
-) CUSTOMIZABLE LABEL

Includes

(1) TS0003 Suitcase (2) TS0004 Compact Organizers



OSA8001 18PC OSCILLATING ACCESSORY SET

ONE SET, MANY USES

Cut, sand, scrape, and more with multiple accessories

) SURFACE VARIETY

Flush cut blade for wood, plastic, and metal

) EASY BLADE CHANGE

Open back attachment design for quick blade change

Includes convenient carrying case to keep your blades organized and easy to access

Includes

Rigid Scraper Blade

Flexible Scraper Blade

3 in Semicircular Blade 1-3/8 in Flush Cut Blade

3 in Sanding Pad

12 pcs 3 x 3 x 3 in Sandpaper



TSM0002-3 ROLLING TOOL BOX 3 PC TOWER SET

Features

-) STACKABLE INTERLOCKING LATCHES
-) IP54 PROTECTION
-) SECURITY PADLOCK HOLE
-) REMOVABLE RAIL HANDLE
-) CUSTOMIZABLE LABEL
-) TETHER POINT
-) INTEGRATED EASY-RACK DESIGN
-) HAND TOOL RACK INCLUDED

Includes

- (1) TS0003 Suitcase
- (1) TS0002 Medium Box
- with (1) Hand Tool Rack
- (1) Accessory Bin with Dividers (1) TS0001 Rolling Box
- with (1) Handle Tray



MXS8505 44PC DRILLING AND SCREW DRIVING BIT KIT WITH BIT GRIP™

Features

) 4X MAGNETIC FORCE

Universal magnetic Bit Grip™ collar

Includes

(26) Screw Driving Bits

(16) Drill Bits

Universal Magnetic Bit Collar

Magnetic Insert Bit Holder / Screw Guide



TSM0003-4 ROLLING TOOL AND ORGANIZER BOX **4 PC TOWER SET**

Features

-) STACKABLE INTERLOCKING LATCHES
-) IP54 PROTECTION
-) SECURITY PADLOCK HOLE
-) REMOVABLE RAIL HANDLE
-) CUSTOMIZABLE LABEL) TETHER POINT
-) INTEGRATED EASY-RACK DESIGN
-) ORGANIZER WITH REMOVABLE DIVIDERS

Includes

(1) TS0003 Suitcase (2) TS0004 Compact Organizer with (1) Long Divider (6) Short Dividers (1) TS0001 Rolling Box with (1) Handle Tray



SDB7013 50PC SCREW DRIVING BIT KIT

Features

PATENTED BIT GRIP™ MAGNETIC BIT COLLAR

Holds screws securely for one-handed use, with 4X magnetic force

) A VARIETY OF THE MOST COMMONLY USED DRIVING BITS ALL IN ONE KIT An assortment of Phillips, slotted, hex, and square bits

) INCLUDES CONVENIENT CARRYING CASE

To keep you bits organized and easy to access

Includes

1 in Screwdriver Bits: (9) Phillips. (6) Square, (6) Star, (6) Hex and Slotted 2 in Screwdriving Bits: (5) Phillips, (4) Square, (6) Star, (3) Slotted



ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
N N N N N N N N N N N N N N N N N N N	75580	5-3/8 In. 80T Plywood Circular Saw Blade	Kerf: 0.05 in Blade Diameter: 5-3/8 in Compatibility: CR541802
TUNS	75128M	10 In. 28T Carbide General Purpose Circular Saw Blade	Kerf: 0.07 in Blade Diameter: 10 in Compatibility: TS6307-01, SKIL Cordless 10 in table saw
7//X/5	75140B10	10 In. 40T Carbide General Purpose Circular Saw Blade Counter Pack	Kerf: 0.07 in Blade Diameter: 10 in Compatibility: TS6307-01, SKIL Cordless 10 in table saw
	75350	3-3/8 In. 50T Plywood Circular Saw Blade	Kerf: 0.04 in Blade Diameter: 3-3/8 in
	75536	4-3/8 In. 36T Carbide Flooring Circular Saw Blade	Kerf: 0.05 in Blade Diameter: 4-3/8 in Compatibility: 3601-02, SKIL cordless flooring saw
	75540	4-3/8 In. 40T Carbide Flooring Circular Saw Blade	Kerf: 0.05 in Blade Diameter: 4-3/8 in Compatibility: 3601-02, SKIL cordless flooring saw
	75718B25	7-1/4 In. 18T Carbide Circilar Saw Blade Counter Pack	Kerf: 0.06 in Blade Diameter: 7-1/4 in Compatibility: 5180-01, 5080-01, 5280-01, SPT67WE-01
	7824B10	8-1/4 In. 24T Carbide Circular Saw Blade Counter Pack	Kerf: 0.06 in Blade Diameter: 8-1/4 in
- B	74700B25	7-1/4 In. x 100-Tooth Ultra Fine Finish Circular Saw Blade	Kerf: 0.05 in Blade Diameter: 7-1/4 in
	75760B10	7-1/4 In. 24T Carbide Circular Saw Blade Counter Pack	Kerf: 0.06 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
2/401	CRB1001	5-1/2 In. 18T Carbide Circular Saw Blade	Kerf: 0.04 in Blade Diameter: 5-1/2 in Compatibility: CR541802
	CRB1002	6-1/2 In. 24T Carbide Circular Saw Blades	Kerf: 0.04 in Blade Diameter: 6-1/2 in Compatibility: CR540602, CR540601, CR540603, CR5413-1A
100	75740W	7-1/4 In. 40T Carbide Circular Saw Blade	Kerf: 0.06 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws
	75724W	7-1/4 In. 24T Carbide Circular Saw Blade	Kerf: 0.06 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws
Shu	79600	6 in Dado Set	Compatibility: SPT99, SPT99T
	CRB1003-2	4-1/2 In. 24T & 40T Carbide Circular Saw Blade Set	24T Framing Blade 40T Finishing Blade
- Kal	CRB1002-3	6-1/2 In. 24T Carbide Circular Saw Blade 3 pk	Kerf: 0.04 in Blade Diameter: 6-1/2 in Compatibility: CR540602, CR540601, CR540603, CR5413-1A
SKIL	75740B10	7-1/4 In. 40T Carbide Finish Circular Saw Blade Counter Pack	Kerf: 0.06 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws
SKIL	75724-10	7-1/4 In. 24T Carbide Circular Saw Blade 10 pk	Kerf: 0.06 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws
	CRT0702	2 x 27.5 ln. Track Guide	(2) Aluminum Extruded Hex Key Guided Rails (2) Clamps Guide Rail Connector



ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
AND DESCRIPTION OF THE PERSON	94100	The UGLY 9 In. 5-TPI Wood Cutting Reciprocating Saw Blade	Fleam-ground teeth Wood Cutting 9-Inch Blade
The same of the sa	94101	The UGLY 8 In. 6-12-TPI Wood Cutting Reciprocating Saw Blade	For wood, metal, and nail-embedded wood cutting Progressive tooth design for consistent cutting in thick or thin material
100 page 1	94102	The UGLY 6 In. 8-14-TPI Metal Cutting Reciprocating Saw Blade	For cutting sheet metal, copper pipe, metal framing, ducts, conduit, tin roofing, aluminum and steel siding, gutters, and more Progressive tooth design for consistent cutting in thick or thin material
All the second	94103	6 pc Reciprocating Saw Blade Set	Fleam-ground teeth Wood Cutting 9-Inch Blade
3558 3558 3558	94100-05	The UGLY 9 In. 5-TPI Wood Cutting Reciprocating Saw Blade 5 pack	For cutting wood, composite board, decking, treated lumber, plywood, and pruning Precision-ground cutting edges for faster chip removal and sharper, cleaner cuts Fire-hardened for extended blade life
### ###	94100-3	The UGLY 9 In. 5-TPI Wood Cutting Reciprocating Saw Blade 3 pk	Fleam-ground teeth Wood Cutting 9-Inch Blade
2222	94101-5	The UGLY 8 In. 6-12-TPI Wood Cutting Reciprocating Saw Blade 5 pk	For wood, metal, and nail-embedded wood cutting Progressive tooth design for consistent cutting in thick or thin material
SOR EST OF STATE OF S	94102-5	The UGLY 6 In. 8-14-TPI Metal Cutting Reciprocating Saw Blade 5 pk	For cutting sheet metal, copper pipe, metal framing, ducts, conduit, tin roofing, aluminum and steel siding, gutters, and more
	94105-5	5 pc General Purpose Reciprocating Saw Blade 5 pk	For wood, metal, and nail-embedded wood cutting Progressive tooth design for consistent cutting in thick or thin material
SKIL	JSB2000	21 pc All-Purpose T-Shank Jig Saw Blade Set	T-Shank Compatible

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
000	80151	3 pc 59-1/2 Bandsaw Blade Set	Compatible with BW9501-00
	80181	18 pc Scrollsaw Blade Set	Compatible with SS9503-00
	80182	36 pc Scrollsaw Blade Set	Compatible with SS9503-00
A	LL9000	3-1/2 ft Compact Tripod with Adjustable Aiming Base	
	91001	3 pc Carbide Straight Set	Precision ground solid Smooth running carbide cutting edge bearings Heat treated shanks and bodies
† † †	91002	3 pc Carbide Roundover Set	Precision ground solid Smooth running carbide cutting edge bearings Heat treated shanks and bodies
†††	91003	3 pc Carbide Decorative Edge Set	Precision ground solid Smooth running carbide cutting edge bearings Heat treated shanks and bodies
114144	91006	6 pc Router Bit Set w/ Instructions	Precision ground solid Smooth running carbide cutting edge bearings Heat treated shanks and bodies
!!!!!!!! !!!!!!!	91015	15 pc Router Bit Set w/ Instruction	Precision ground solid Smooth running carbide cutting edge bearings Heat treated shanks and bodies
	91030	30 pc Router Bit Set w/ Window	Precision ground solid Smooth running carbide cutting edge bearings Heat treated shanks and bodies



ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
	SDB7014	141pc Screw Driving Kit with Bit Grip™	Patented Bit Grip™ Includes Convenient Magnetic Bit Collar Carrying Case Ideal for Driving into a variety of Surfaces
	SMXS8501	120pc Drilling and Screw Driving Kit with Bit Grip™	Patented Bit Grip™ Includes Convenient Magnetic Bit Collar Carrying Case Ideal for Driving into a variety of Surfaces
	SDB7017	47 pc Screwdriving Bit Kit	Includes 2-3/8 in Magnetic Extension Bit Holder Interlocking Case Removable Inserts
	98021	21 pc Assorted Set High-Speed Steel Twist Drill Bit Set	1/4 in Hex Shank Carbide Tipped Dual Flutes
	98029	29 pc Assorted Set High-Speed Steel Twist Drill Bit Set	
	TDB5000	15 pc Hex Twist Bit Set	Interlocking Case 1/4 in Hex Shank Carbide Tipped
	MDB5000	10 pc Hex Shank Carbide Hammer Drill Bit Set	Interlocking Case 1/4 in Hex Shank Carbide Tipped
	93102	5/32 In. Cardibe Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
	93103	3/16 In. Cardibe Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
	93104	1/4 In. Cardibe Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
	93109	3/8 In. Cardibe Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
0000	MDB5104	5/16 X 5 In. Carbide Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
	MDB5101	5/32 x 4 In. Carbide Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
	MDB5102	3/16 x 4 In. Carbide Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
	MDB5103	1/4 x 5 In. Carbide Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
	MDB5105	3/8 x 4 In. Carbide Tipped Masonry Drill Bit	1/4 in Hex Shank Carbide Tipped Dual Flutes
	CDA9003	20-Piece Mixed 5 In. Round Sanding Paper Kit	Hook and Loop Aluminum Oxide grain creats a constitant scratch pattern sander for Maximum Dust Extraction
	CDA9004	20-Piece Mixed Triangle Sanding Paper Kit	Hook and Loop Aluminum Oxide grain creats a constitant Hole Patter Matches sander for Maximum Dust Extraction
	CDA9005	30 pc Mixed Detail Sand Paper Kit	Hook and Loop Backing Hole Patter Matches sander for Maximum Dust Extraction Aluminum Oxide grain creats a constitant scratch pattern scratch pattern
	73110	Octo Sandpaper 60-80-120 Grit, 5pk	Hook and Loop Aluminum Oxide Grain Backing Creates a Constitant Hole Patter Matches sander for Maximum Dust Extraction



ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
0	STZ6307	Dado Insert Plate	Compatible with SKIL Table Saw TS6307-00
7. 1 .7	STZ6307	Zero Clearance Insert Plate	Compatible with SKIL Table Saw TS6307-00
	OSA8005	5 pc Oscillating Multi-Tool Blade Set	Compatible with all SKIL Oscillating Multi-Tools
	OSA8004	6 pc Oscillating Multi-Tool Plunge Cutting Blade Set	Compatible with all SKIL Oscillating Multi-Tools
	OSA8003	5 pc Oscillating Multi-Tool Accessory General Purpose Blade Set	Compatible with all SKIL Oscillating Multi-Tools



OUTDOOR POWER ACCESSORIES

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
	SNR0001	Round Blower Nozzle	Compatible with SKIL Brushless PWRCORE 40™ Blowers
	SMB2000	20 In. Lawn Mower Blade	For Bagging and Mulching (Universal Blade) Compatible with SKIL Brushless PWRCORE 40 TM 20 In. Mowers
	STH4818	Rapid Reload Trimmer Head	Quick and Easy Line Load Bump-Feed Head Bump-Feed Head Still Brushless PWRCORE 40 TM 14 In. String Trimmers & Brushless PWRCORE 20 TM 13 In. String Trimmers
	STL2020	Pre-Cut Trimmer Line	
· ···· SKILL	SBR0604Q	6 In. Chain Saw Replacement Bar	Compatible with SKIL 6 in Chain Saws
	SCN0604Q	6 In. Chain Saw Replacement Chain	Compatible with SKIL 6 in Chain Saws
—//SKIL ₽	SBR1204	12 In. Chain Saw Replacement Bar	Compatible with SKIL 12 in Chain Saws (TH1200C-11 Only)
← SKIL·	SBR1200	12 In. Chain Saw Replacement Bar	Compatible with SKIL 12 in Chain Saws
Action to the second se	SCN1204	12 In. Chain Saw Replacement Chain	Compatible with SKIL 12 in Chain Saws (TH1200C-11 Only)
	SCN1200	12 In. Chain Saw Replacement Chain	Compatible with SKIL 12 in Chain Saws



OUTDOOR POWER ACCESSORIES

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
C· ₹ SKIL →	SBC1400	14 in Chain Saw Bar and Chain Kit	Reversible for Long Life Compatible with SKIL Brushless PWRCORE 40 TM Low Kickback Design 14 In. Chain Saws
○ £ SKIL ÷	SBR1400	14 in Chain Saw Bar	Reversible for Long Life Compatible with SKIL Brushless PWRCORE 40 TM Low Kickback Design 14 In. Chain Saws
C	SCN1400	14 in Chain Saw Chain	Low Kickback Design Compatible with SKIL Brushless PWRCORE 40 TM 14 In. Chain Saws
	SBR1805	18 In. Chain Saw Replacement Bar	Compatible with SKIL 18 in Chain Saws
Commence	SCN1800	18 In. Chain Saw Replacement Chain	Compatible with SKIL 18 in Chain Saws
Commence	SCN0800	8 In. Pole Saw Chain	Compatible with SKIL 8 in Pole Saws
. ≤KIL	SBR0800	8 In. Pole Saw Bar	Compatible with SKIL 8 in Pole Saws
← SKIL	SBR1000	10 In. Pole Saw Replacement Bar	Compatible with SKIL 10 in Pole Saws
(management)	SCN1000	10 in Pole Saw Chain	Low Kickback Design Compatible with the SKIL PWRCORE 40 TM 10 In. Pole Saw
	SSS2000	40V 20 In. Snow Blower Scraper Bar	Compatible with SKIL 20 in Snow Blowers

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
	SRP2000	40V 20 In. Snow Blower Rubber Paddle	Compatible with SKIL 20 in Snow Blowers





HIGH PERFORMANCE ACCESSORIES

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
	75924	7-1/4 in 24-Tooth Framing Saw Blade	Kerf: 0.07 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws
	75924B25	7-1/4 in x 24-Tooth Framing Saw Blade BULK Pack (25)	Arbor: 5/8 in round and 13/16 in diamond knockout SPT67WL, SPT67WMB, SPT67WS, SPT77W, SPT77WML, SPTH77M
0	76824	8-1/4 in x 24-Tooth Worm Drive Framing Saw Blade	Arbor: 13/16 in diamond knockout Kerf: 0.08 in Compatibility: SPT78W
Sik	SPT1012	8-1/4 in Circular Saw Blade	Arbor: 5/8 in round Kerf: 0.09 in Compatibility: Major brands hand saws and table saws
	76240	10-1/4 in x 40-Tooth Worm Drive Saw Blade	Arbor: 13/16 in diamond knockout Kerf: 0.08 in Compatibility: SPT70WM
\$ik	SPT1010	12 in x 60-Tooth Miter Saw Blade	Arbor: 1 in round Kerf: 0.1 in Compatibility: SPT88
	SPT1011	12 in x 80-Tooth Miter Saw Blade	Arbor: 1 in round Kerf: 0.1 in Compatibility: SPT88
	SPT1000	16-5/16 in x 32-Tooth Saw Blade	Arbor: 1 in round Kerf: 0.09 in Compatibility: SPT70V-11
	SPT4003	7 in Turbo Diamond Blade	Arbor: 7/8 in-5/8 in round Compatibility: SPT79A and most major brands
	SPT4004	7 in Segmented Diamond Blade	Arbor: 7/8 in-5/8 in round Compatibility: SPT79A and most major brands


ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
	SPT1001	7-1/4 in 4-Tooth Fiber Cement Blade	Arbor: 5/8 in round Kerf: 0.1 in Compatibility: SPT67FMD
	SK1260	12 in x 60-Tooth Dry Cut Metal Blade	Arbor: 1 in. round Kerf: 0.11 in Compatibility: SPT62MTC
	75940	7-1/4 in x 40-Tooth Framing Saw Blade	Kerf: 0.07 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws
SKIL	75924-10	7-1/4 in 24-Tooth Framing Saw Blade 10 pk	Kerf: 0.07 in Blade Diameter: 7-1/4 in Compatibility: Any 7-1/4 in Circ saws
- III skinsky 6	SPT2004-05	6 in Wood w/Nails Reciprocating Saw Blade (5pk)	Compatibility: SPT44A-00, SPT44-10
■ IN INC. SEE # AND	SPT2005-05	9 in Wood w/Nails Reciprocating Saw Blade (5pk)	Compatibility: SPT44A-00, SPT44-10
- 11 seems 6	SPT2007-05	6 in Metal Reciprocating Saw Blade (5pk)	Compatibility: SPT44A-00, SPT44-10
_ = 400444 9 = 2 =)	SPT2008-05	9 in Metal Reciprocating Saw Blade (5pk)	Compatibility: SPT44A-00, SPT44-10
411	SPT5007-EA	Green Cut Early Entry Attachment	Compatibility: SPT79A-10
	SPT5008-EA	Green Cut Early Entry Replacement Kit	Compatibility: SPT79A-10




HIGH PERFORMANCE ACCESSORIES

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
展	SPT5003-FS	Table Saw Stand	Compatibility: SPT99T
	SPT5002-FS	Miter Saw Stand	Compatibility: SPT88
	SPT00B	Rear Outfeed	Compatibility: SPT99
	SPT00A	Dado Insert	Compatibility: SPT99
	SPT00C	Zero Clearance Insert	Compatibility: SPT70WT & SPT99
	SPT5004-ZC	Zero Clearance Insert	Compatibility: SPT99T
	SPT5005-DD	Dado Insert	Compatibility: SPT99T
	SPT1500	16 in Full House Chain	Compatibility: SPT55-11
	SPT1501	16 in Full House Chain and Bar	Compatibility: SPT55-11
9	95104L	Cord Assembly	Compatibility: HD77, HD77M,HD5825, SPT77WM, SPT77WML, HD5860, MAG77LT, SPT78W, SPT78MMC SHD77, SHD77M, SPT55, SPT70WM, SPT70V, SPT77W,

ACCESSORY	MODEL	DESCRIPTION	ADDITIONAL DETAILS
	80111	Worm Drive Oil	Compatibility: SHD77, SHD77M, SPT70WT, MAG77LT, HD77, HD77M, HD5825, HD5860, SPT77W, SPT77WML, SPT77WM, SPT77WML, SPT78W, SPT70WM,
And the second s	SPT5009-SO	Synthetic Oil for Cordless Worm Drive	Compatibility: SPTH77M
4~-	13896	Adjustable Rip Fence	Compatibility: SPT67WL, SPT67WM, SPT67WMB, SPT67FMD, SPT67M8, SPT77WML, SPT78W,
Pos	95105L	Switch Kit	Compatibility: SDH77, SDH77M, SPT77W, SPT77WM, SPT77WML, SPT78W, SPT70WM, SPT79, MAG77LT
	95111L	Brush & Cap Assembly	Compatibility: SHD77, SHD77M, HD77, SPT79A, SPT70WM, HD77-02, HD5825, MAG77LT, SPT70V HD5860, SPT77W, SPT77WM, SPT77WML, SPT78W, SPT79,
	95106	Replacement Blade Wrench	

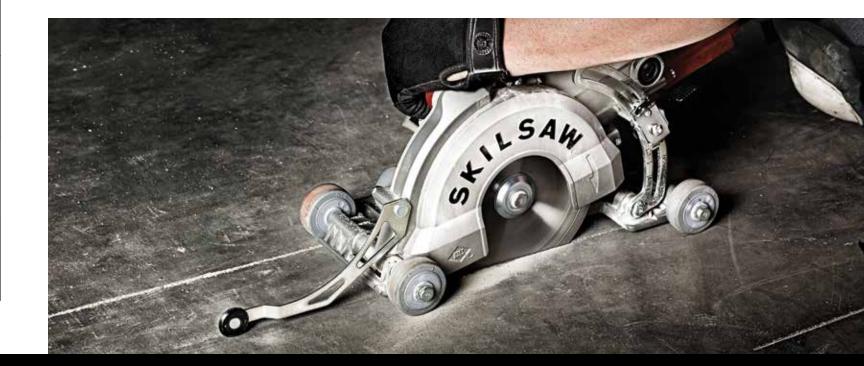

SKIL°

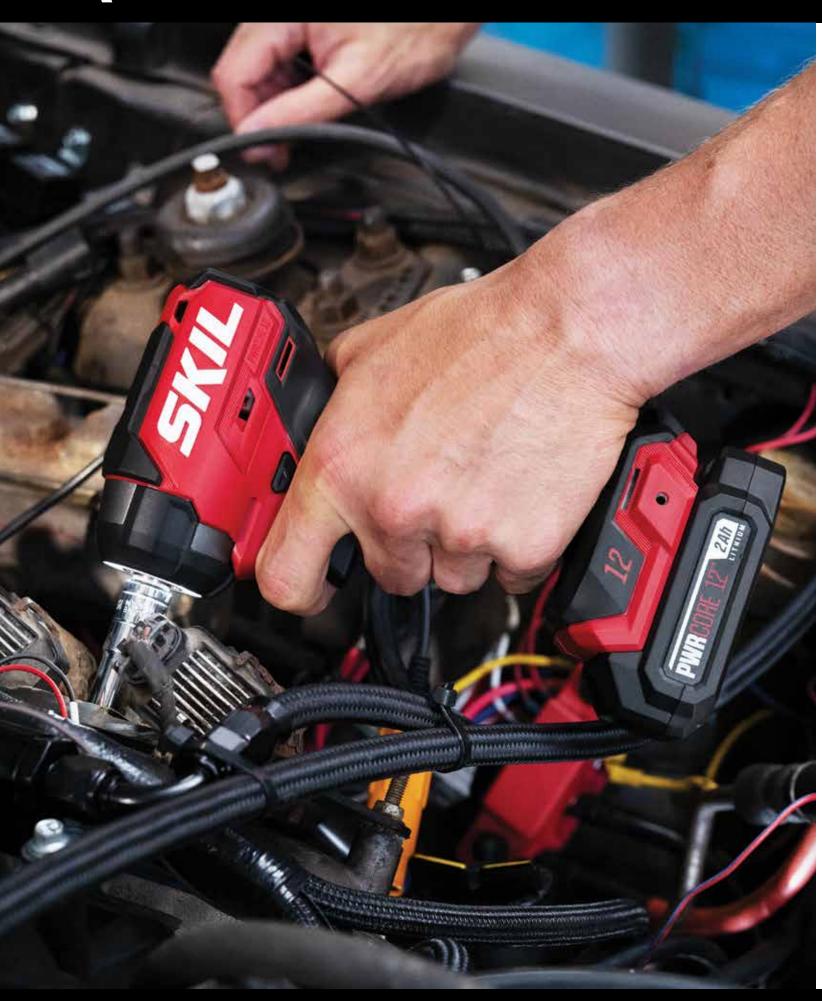

Notes	

